Decorative Wall Luminaire

Dekoratif Aplik

06163

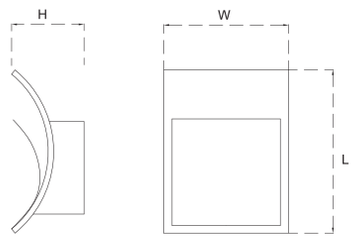

Nickel satin coated metal housing and decorative frosted glass diffuser with indirect and soft light effect.

EEI:A1, A2 class high frequency electronic ballast used.

In LED versions, high efficiency LED driver secures low energy loss.

Usage of halogen-free cable ensures extra safety.

LED module with 50.000h life time and CRI≥80 used.

Wall surface mounting application.

Saten renkli DKP sac gövde ve dekoratif kumlu cam kullanılır.

Göz yormayan endirekt aydınlatma sağlar.

EEI:A1, A2 sınıfı, düşük kayıplı elektronik balast, halogen-free kablo ve Avrupa menşeli duy kullanılır.

LED'li versiyonda düşük kayıplı, yüksek verimli LED sürücü; 50.000 saat ömürlü, CRI≥80 renksel geri verime sahip LED modül kullanılır.

Sıvaüstü aplik olarak uygulanır.

H

220-240V 50/60Hz | IP 20 | ECO | TC-D | LED | TS 8698 EN 60598-2-1

Code *Kod*	Power *Güç* (W)	Light Source *Işık Kaynağı*	Luminous Flux *Işık Akısı* (lm)	Color Temperature *Renk Sıcaklığı* (K)	Dimensions *Boyutlar* (mm) W	L	H
06163.820	8	LED Module	820	4000	252	300	70
06163.750	8	LED Module	750	3000	252	300	70
61500.160	1xE27	ECO		-	252	300	70