



VIVID


05558

Bright Reflector Downlight Fixture

Vivid is an architectural downlight solution that offers controlled and efficient lighting with its deep reflector structure and highly reflective silver reflector.

Designed with a diameter of Ø200 mm, VIVID offers aesthetic solutions to general lighting needs in offices, shops, hotels, educational buildings, and commercial spaces with its simple and modern appearance. The silver reflector structure increases light efficiency while giving the luminaire a professional and technical character.

Thanks to its highly efficient optical system and compact structure, the VIVID Series combines aesthetic appearance with lighting performance in architectural projects, and adapts to project-specific applications with different power and color temperature options.

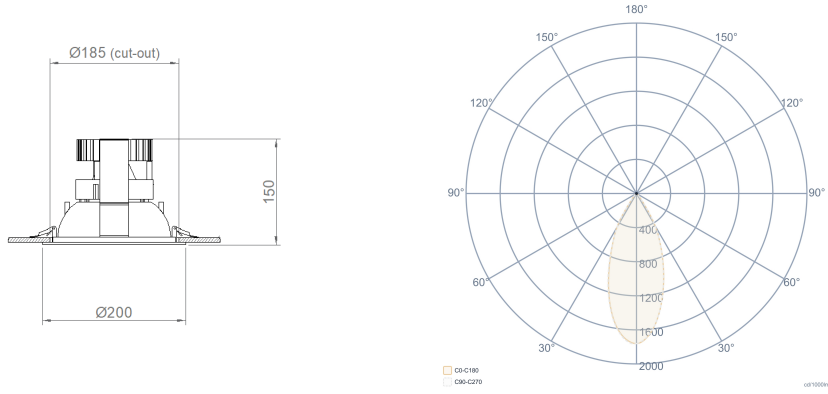

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum	Power	27W	Light Output Angle	45°
Frame	Metal	Power Factor	>0.95	UGR Value	UGR < 16
Optics	Aluminum Reflector	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coating	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class II	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Product Dimensions [mm]	Ø200 x 150(H)	LED Driver	Constant Current		
Mounting Type	Recessed	Ambient Temperature	-20°C / +50°C		
Mounting Part	Steel Spring	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05558.13.30.021	27	2435	3000	Ø200x150	Ø185	0,75
05558.13.40.021	27	2670	4000	Ø200x150	Ø185	0,75