



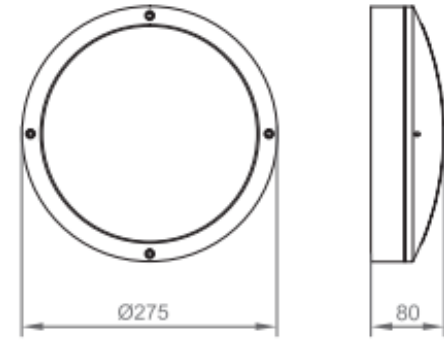

RAL 7016

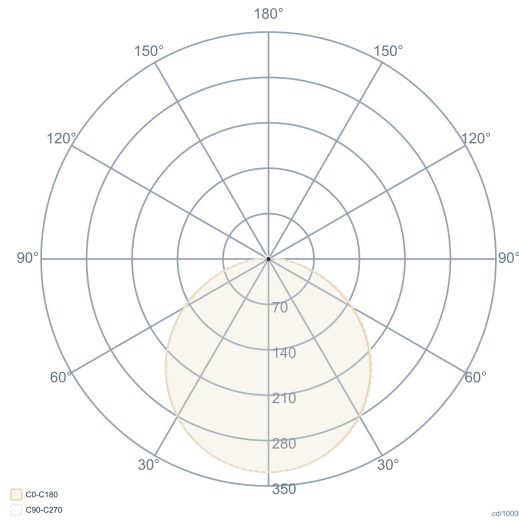

General Information		Electrical Info		Lighting Technology	
Body & Frame	Cast Aluminum	Power	14-19W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Gasket	Silicon	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	Ø275 x 80mm	LED Driver	Constant Current		
Mounting Type	Surface	Ambient Temperature	-20°C / +50°C		
Mounting Part	Screw Dowel Set	LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Light Source	CCT	ØD x H (mm)	Kg
09112.27.30.010	14	900	3000	275x80	1,30
09112.27.40.011	14	1000	4000	275x80	1,30
09112.27.30.016	19	1150	3000	275x80	1,30
09112.27.40.017	19	1250	4000	275x80	1,30

