
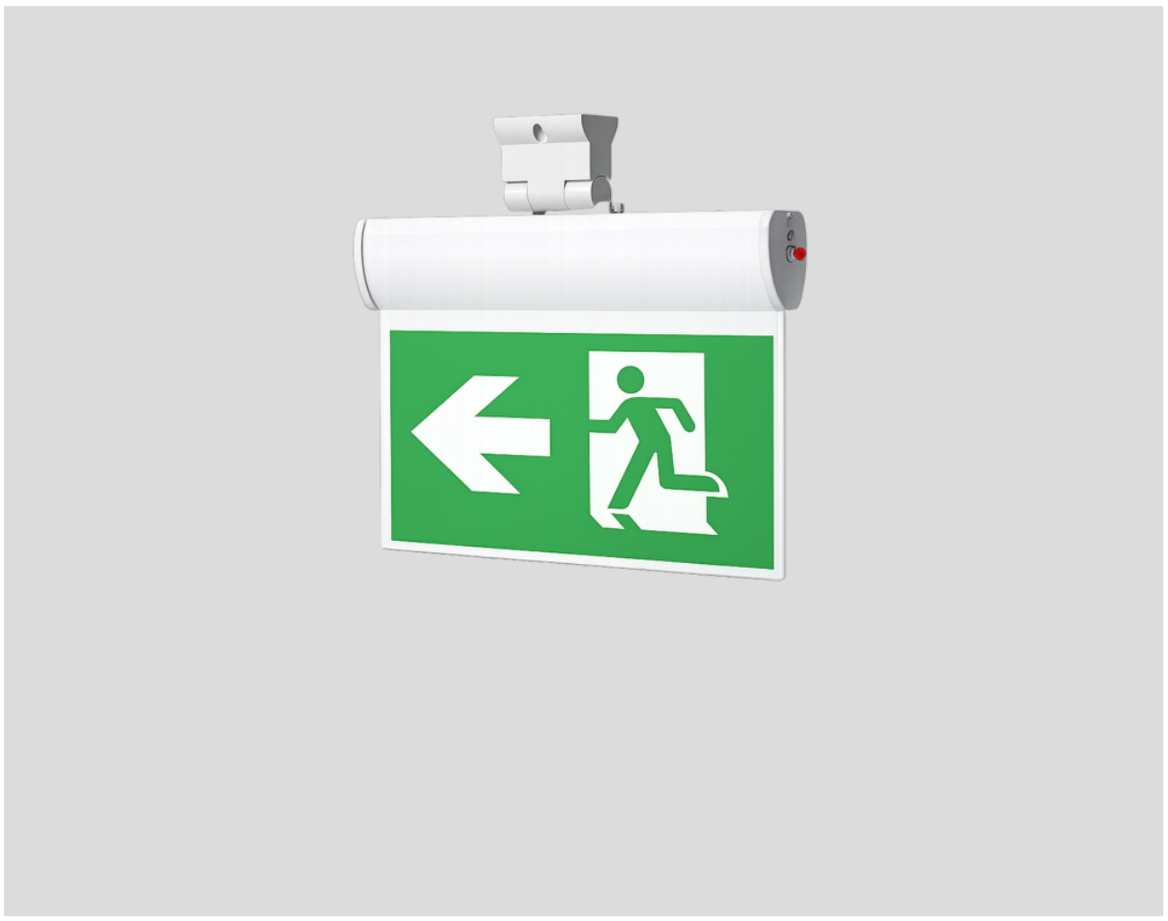


RUN

80300

Flexible Mounting Emergency Exit Fixture

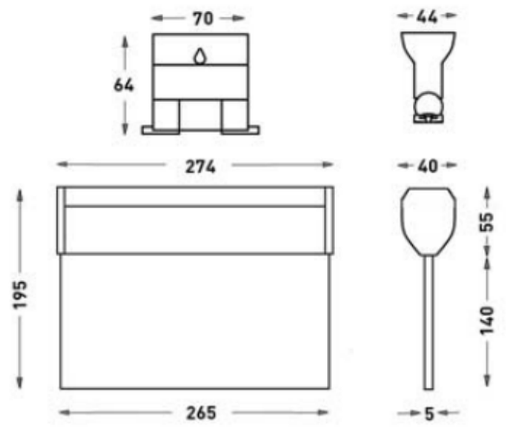

General Information		Electrical Info		Lighting Technology
Meterial	Aluminium	**Power**	4,87W	
Frame	Foil Printed Acrylic Lens	**Power Factor**	>0.90	
Optics	Transparent Plexiglass	**Light Source**	SMD Mid Power LED	
Paint	Anodizing	**Input Voltage**	220-240V AC / 50-60 Hz	
Side Cover	Policarbon	**LED Driver**	Constant Current Output Rail	
Insulation Class	Class II	**Ambient Temperature**	0°C / +40°C	
Product Dimensions [mm]	40(W)X195(H)X265(L)			
Mounting Type	Surface and Recessed			
Mounting Part	Metal Bracket			

Optional
Emergency Test Button
2700K ~ 6500K
Battery Charge Indicator with Green LED

Order Code	W	How to use	Battery	WxHxL (mm)	Kg
80312.010.003-IK03-IK04	4,87	Çift Yüzlü	3H	40X195X265	0,665

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com