





ANGEL

01140

Architectural Circular Pendant Lighting Luminaire

The ANGEL Series creates a light and modern look in any space with its hollow ring form and simple design language. Thanks to its circular structure that provides homogeneous light distribution, it offers decorative and comfortable lighting, while standing out as a strong design element in architectural projects.

With its aluminum body and slim profile details, ANGEL offers a minimalist aesthetic, adapting to contemporary spatial arrangements in offices, social areas, and commercial projects. With its pendant mounting structure, different diameter options, and control alternatives, custom lighting scenarios can be created for each project.

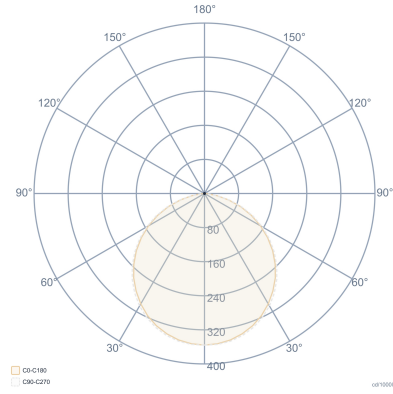

General Information		Electrical Info		Lighting Technology	
Material	Aluminum Extruded	Power	40-120W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø600/900/1200x82(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Pendant	LED Driver	Constant Current		
Mounting Part	Height Adjustable Steel Wire	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
01140.90.30.077	90	7700	3000	Ø900x82	4,50

