

U-LINE 01132


01132


Architectural Direct Pendant Lighting Luminaire

The U-Line Series offers a decorative and modern lighting solution with its open form structure and unique design language. Thanks to its U-shaped structure, it provides balanced lighting by creating a light and architectural look in the space.

With its anodized aluminum body and simple design details, it adds an aesthetic character to contemporary projects. Its pendant mounting structure makes it a strong design element in office, commercial, and social areas. With different color temperature and control options, it adapts to project-specific lighting scenarios, offering both functional and decorative lighting.

RAL 9005 RAL 9006

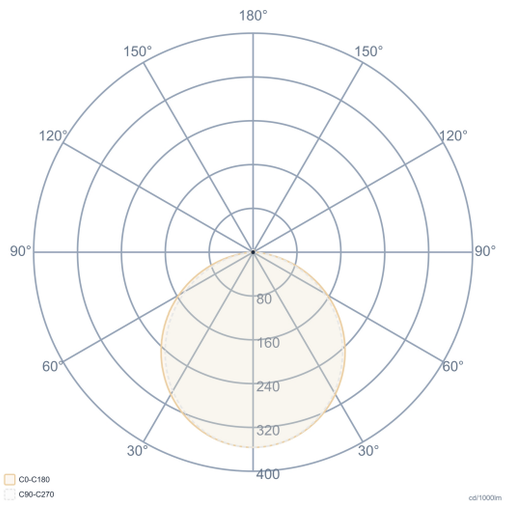

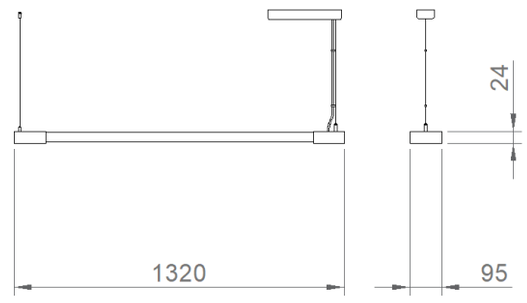

General Information	
Housing	Aluminum Anodized
Optics	Acrylic Lens
Paint	Gray Anodized Coating
Insulation Class	Class I
Product Dimensions [mm]	95(W) x 24(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Hanging Wire

Electrical Info	
Power	36W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg
01132.13.30.035	36	3500	3000	1320	1.40
01132.13.40.036	36	3600	4000	1320	1.40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com