

RAL 9005 RAL 9006


U-LINE 01135


01135

Architectural Direct/Indirect Pendant Lighting Luminaire

U-Line Cross offers a powerful architectural impact thanks to its unique structure created by the intersection of two different U-Line forms.Its design language, which was awarded the 2014 Design Turkey Good Design Award, combines aesthetics and functionality, while providing a balanced and comfortable lighting experience by offering both direct and indirect lighting.

With its slim and modern form, it adds a unique character to contemporary projects. Thanks to different combination alternatives, decorative and dynamic lighting compositions can be created.

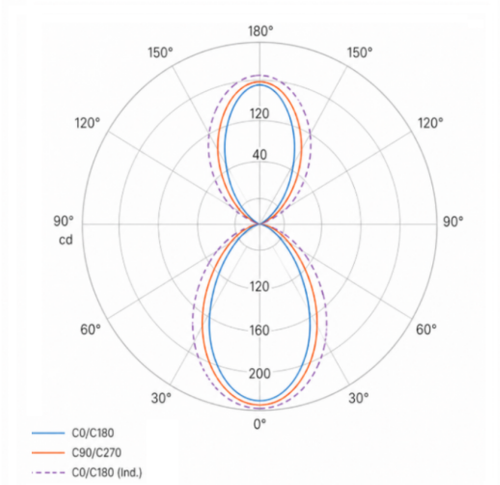

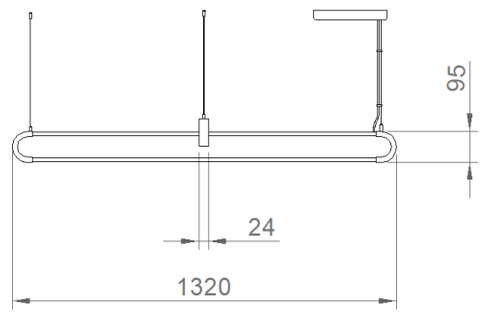

General Information	
Housing	Aluminum Anodized
Optics	Acrylic Lens
Paint	Gray Anodized Coating
Insulation Class	Class I
Product Dimensions [mm]	1320(W)x1320(L)x95(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Hanging Wire

Electrical Info	
Power	72W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120° (Direct/Indirect)
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	L (mm)	Kg	Direct	Indirect
01135.13.30.070	72	7000	3000	1320	2,80	50 %	50 %
01135.13.40.072	72	7200	4000	1320	2,80	50 %	50 %

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com