


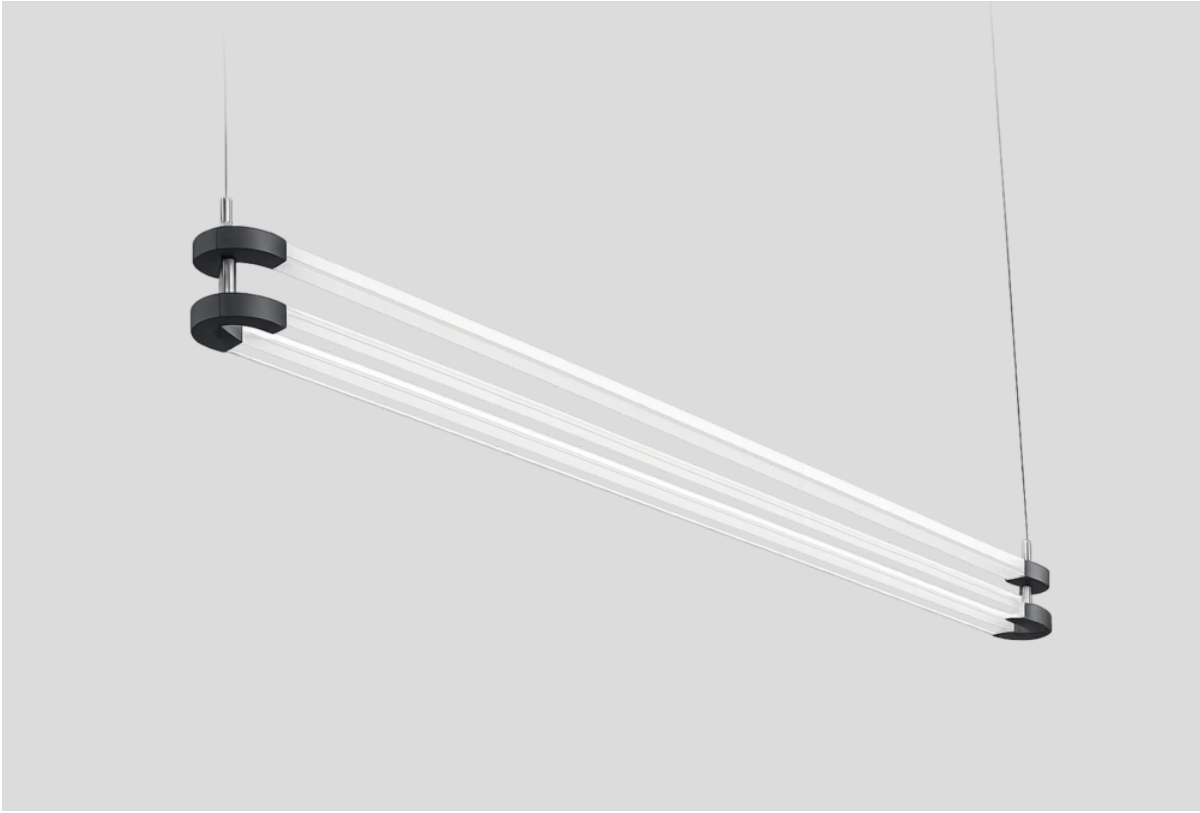

RAL 9006



U-LINE 01136

01136

Architectural Direct/Indirect Pendant Lighting Luminaire

The U-Line Series offers a decorative and modern lighting solution with its open form and unique design language. Its U-shaped structure creates a light and architectural look in the space, while providing balanced lighting by combining direct and indirect light effects.

With its anodized aluminum body and simple design details, it adds an aesthetic character to contemporary projects. It stands out as a strong design element in office, commercial, and social areas. It adapts to specific lighting scenarios, offering both functional and decorative lighting.

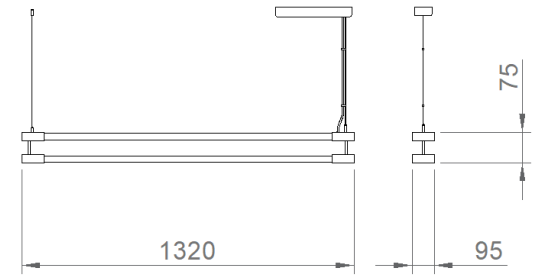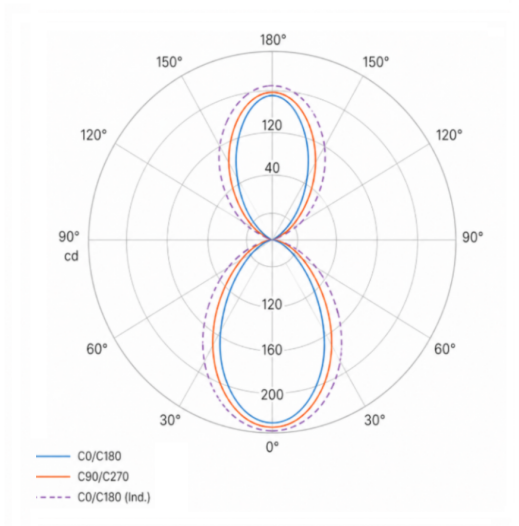

General Information		Electrical Info		Lighting Technology	
Material	Aluminum Anodized	Power	72W	Light Output Angle	120° (Direct/Indirect)
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Painted	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	95(W) x 75(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit
Mounting Type	Pendant	LED Driver	Constant Current		
Mounting Part	Height Adjustable Hanging Wire	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	L (mm)	Kg	Direct	Indirect
01136.13.30.070	72	7000	3000	1320	2.80	50 %	50 %
01136.13.40.072	72	7350	4000	1320	2.80	50 %	50 %

