


Lightline - 058

Indoor Lighting - Linear Lighting, Surface Mounted Lighting



Colour Options

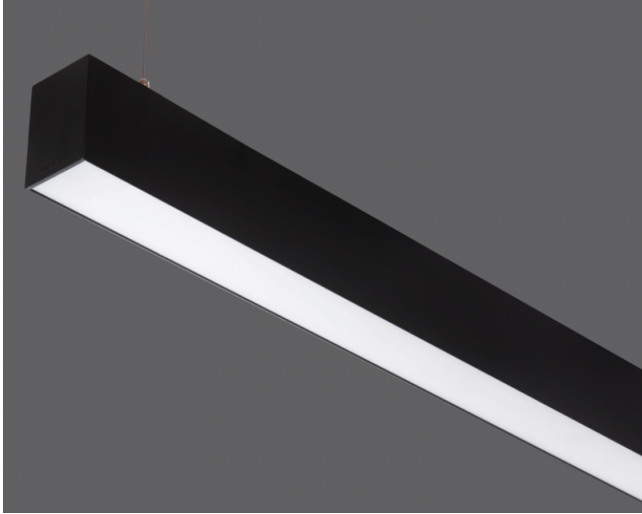

Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Extruded Aluminum Profile
Side Cover	Aluminum Injection
Diffuser	Highly Transmissive Opal Diffuser
Dimensions(mm)	58(W) x 82(H)
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL






Power (W)	15-62W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Surface Mounted, Pendant
Mounting Apparatus	Height Adjustable Steel Wire

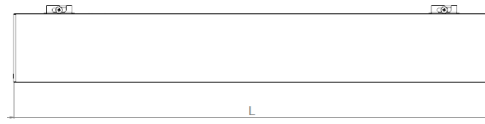

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.57.30.015	16	1450	3000	Ra>80	575	1,3
01180.57.40.016	16	1570	4000	Ra>80	575	1,3
01180.57.30.021	21	1680	3000	Ra>80	575	1,3
01180.57.40.022	21	1770	4000	Ra>80	575	1,3
01180.57.30.023	22	1950	3000	Ra>80	855	2,0
01180.57.40.024	22	2075	4000	Ra>80	855	2,0
01180.57.30.032	31	2700	3000	Ra>80	855	2,0
01180.57.40.033	31	2800	4000	Ra>80	855	2,0
01180.57.30.031	29	2400	3000	Ra>80	1135	2,7
01180.57.40.032	29	2500	4000	Ra>80	1135	2,7
01180.57.30.043	42	3250	3000	Ra>80	1135	2,7
01180.57.40.044	42	3400	4000	Ra>80	1135	2,7
01180.57.30.038	36	3200	3000	Ra>80	1415	3,2
01180.57.40.039	36	3350	4000	Ra>80	1415	3,2
01180.57.30.053	52	4550	3000	Ra>80	1415	3,2
01180.57.40.055	52	4700	4000	Ra>80	1415	3,2
01180.57.30.046	43	3900	3000	Ra>80	1695	3,7
01180.57.40.048	43	4100	4000	Ra>80	1695	3,7
01180.57.30.064	62	5640	3000	Ra>80	1695	3,7
01180.57.40.066	62	5900	4000	Ra>80	1695	3,7



Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com

