



RAL 9016 RAL 9006



DOME-G

02115

Direct Performance, Indirect Comfort

The Dome G Series combines direct and indirect lighting in a single unit, offering a balanced and comfortable lighting solution for modern interiors. The central lighting surface with an opal diffuser provides a homogeneous and soft distribution of direct light, while the indirect light outlets on the sides direct light towards the ceiling, creating a spacious and comfortable atmosphere.

Thanks to its flush-mounted design, its simple appearance integrates seamlessly with the ceiling, and its balanced light distribution makes it an ideal solution for offices, educational buildings, healthcare facilities, and commercial spaces. Bringing together the efficiency of direct lighting with the comfort of indirect lighting, Dome G combines aesthetics and performance in modern architectural projects.

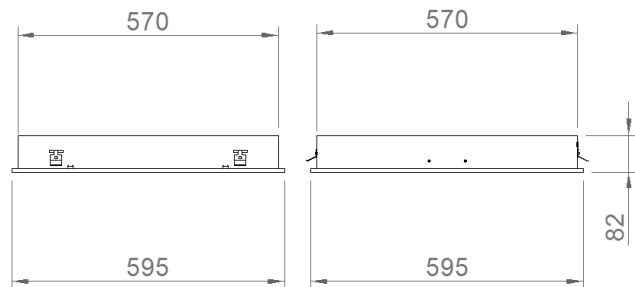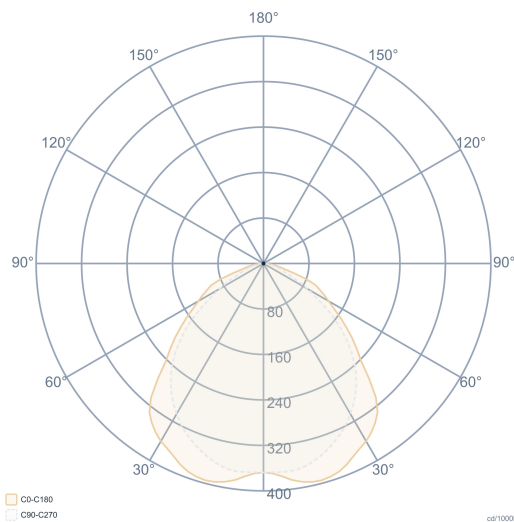

General Information		Electrical Info		Lighting Technology	
Body & Frame	DKP Metal Sheet	Power	29-60W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 19
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 82(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Metal Bracket	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02115.66.30.023	29	1980	3000	595x595x80	575x575	4,70
02115.66.40.024	29	2120	4000	595x595x80	575x575	4,70
02115.66.30.031	41	2680	3000	595x595x80	575x575	4,70
02115.66.40.042	41	2890	4000	595x595x80	575x575	4,70
02115.66.30.052	60	3560	3000	595x595x80	575x575	4,70
02115.66.40.056	60	3600	4000	595x595x80	575x575	4,70

