



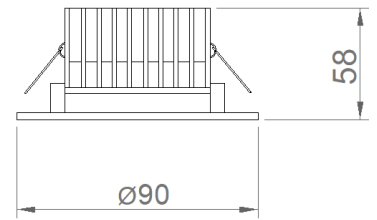

RAL 9016

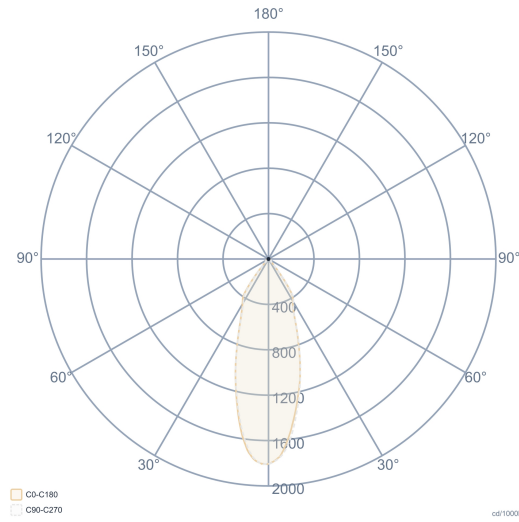

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	7-12W	Light Output Angle	35°
Optics	Polished Reflector + Glass	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Coating	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class II	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	Ø90x58(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Mounting Type	Recessed	LED Driver	Constant Current		DALI / 1-10V
Mounting Part	Steel Spring	Ambient Temperature	-20°C / +50°C		CRI>90 , 2700K~6500K , Tunable White
		LED Lifetime L70	>50.000 Hour		Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05378.90.30.007	7	800	35°	3000	90x58	Ø75	0,60
05378.90.40.007	7	850	35°	4000	90x58	Ø75	0,60
05378.90.30.010	12	1180	35°	3000	90x58	Ø75	0,60
05378.90.40.010	12	1245	35°	4000	90x58	Ø75	0,60

