

Mark

Indoor Lighting - Appliques



TECHNICAL INFORMATION

Housing	Aluminium injection
Diffuser	High Transmittance Opal Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Light Distribution	Asymmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 19
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	2W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	50.000 Hour

OPTIONAL

- DALI	- Tunable White
- Emergency Lighting Unit	- CRI > 90
- 2700K ~ 6500K	- Different RAL Color Options
- Plug-in Connector	- Class-I Protection Class
- PIR Sensor	- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Under Plaster

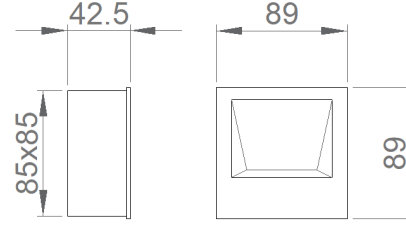

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
06201.99.30.002	2	50	3000	Ra>80	89x89x42,5	0,3
06201.99.40.002	2	50	4000	Ra>80	89x89x42,5	0,3

