

RAL 7016


CICALA

81615

Powerful Emergency Lighting for Safe Evacuation

Cicala safely illuminates escape routes and critical areas during power outages. Its adjustable dual projector structure allows the light to be directed in the desired direction. With 180° movable headlights, SMD LED technology, and a 3-hour emergency operating time, the integrated battery system, test button, and charge indicator facilitate easy maintenance and inspection.

With its durable sheet metal housing, provides effective emergency lighting in factories, warehouses, parking lots, technical areas, production areas, corridors, stairwells, and large indoor spaces. Its adjustable projectors and long-lasting battery support make it an ideal solution for maximum visibility and safe evacuation during emergencies.

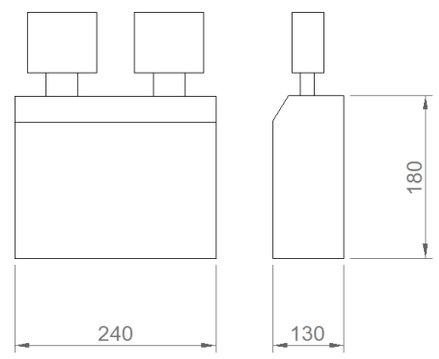

General Information	
Housing	DKP Metal Sheet
Optics	Acrylic Lens
Paint	Electrostatic Powder Coated
Battery	Maintenance-free Lead Acid
Emergency Working Hours	3 Hour
Insulation Class	Class II
Product Dimensions [mm]	90(W)x200(H)x240(L)
Mounting Type	Surface
Mounting Part	Metal Bracket

Electrical Info	
Power	2x9W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current Output Rail
Ambient Temperature	+10C / +40°C

Lighting Technology	
UGR Value	UGR ≤ 19
CRI [Ra]	CRI ≥ 80

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Mode of Operation	Battery	WxHxL (mm)	Kg
82210.011.000	2x9	1590	Acil Kesintide	3H	90x200x240	4,00

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com