





BEAM-D

06602

Double-Sided Outdoor Wall Sconce

Beam-T is an outdoor wall sconce that provides aesthetic lighting to facades with its symmetrical upward and downward light distribution. Its cylindrical form and minimalist design integrate seamlessly with architectural structures. It offers decorative and functional lighting on building facades. Its compact design and dual-directional COB LED structure create balanced light patterns on wall surfaces. It provides a stylish solution that highlights architectural details in entrances, hotels, residential projects, commercial buildings, and landscape applications.

Its aluminum housing and IP65 protection class ensure resistance to harsh outdoor conditions. Available in black, white, and anthracite, it adapts to various architectural styles. Its aesthetic appearance, long lifespan, and dual-directional light effect make it an ideal choice for outdoor lighting.

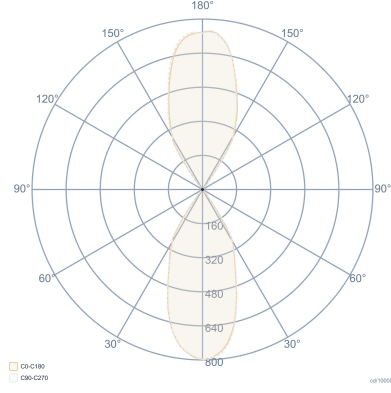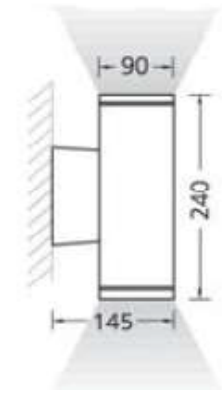

General Information		Electrical Info		Lighting Technology	
Material	Cast Aluminum	Power	2x13W	Light Output Angle	43°
Optics	Polished Reflector	Power Factor	>0.95	UGR Value	UGR ≤ 25
Glass	Tempered, Clear Glass	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coating	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White
Product Dimensions [mm]	Ø90x225(H)x135(L)	LED Driver	Constant Current		
Mounting Type	Surface	Ambient Temperature	-25°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØxHxL (mm)	Kg
06602.91.30.022	2x13	2x875	3000	90x225x135	1,80
06602.91.40.023	2x13	2x925	4000	90x225x135	1,80

