



Running

Trunking Lighting Systems - Lighting Units

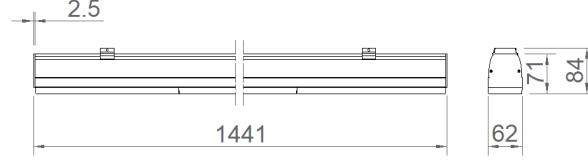

TECHNICAL INFORMATION

Housing Electrostatic Powder Coated Aluminum Profile
Optics High Light Transmittance Optical Lens

OPTICAL SPECIFICATIONS

Light Distribution Symmetrical
Light Output Angle 90°
UGR Value UGR ≤ 19
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL

Power (W) 53-65W
Power Factor >0.95
Cabling Halogen-Free
Input Voltage 220-240V AC/ 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +40°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

DALI
Emergency Kit (1h/3h)

ASSEMBLY

Installation Type Surface Mounted, Pendant

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
72039.05.100.682.042 .DEC	52	7400	4000	Ra>80	62x1417x71	3,6

