





TIE-G

02119

Decorative Panel Lighting Fixture

Tie-G is a professional panel lighting solution developed for offices, educational institutions, healthcare facilities, and commercial spaces, featuring a metal sheet housing and flush-mounted design. Its homogeneous light distribution provides comfortable and balanced lighting, while its simple design creates a seamless look integrated with the ceiling surface.

With various power, color temperature, and control options, it adapts to project-specific lighting scenarios.

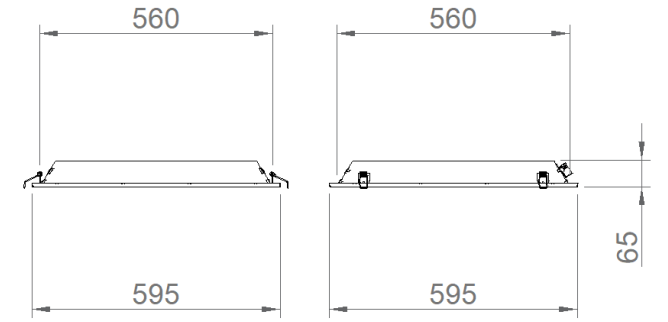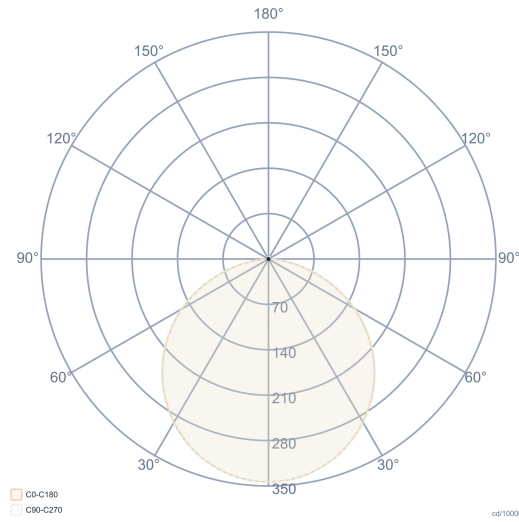

General Information		Electrical Info		Lighting Technology	
Body & Frame	Metal Sheet	Power	33W	Light Output Angle	110°
Diffuser	High Transmittance Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	Mc Adams ≤ 3
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	595(W) x 595(L) x 66(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type		LED Driver	High Efficiency Constant Current Output		
Mounting Part		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02119.66.30.032	33	3200	3000	Ra>80	595x595x80	575x575	4,1
02119.66.40.034	33	3200	4000	Ra>80	595x595x80	575x575	4,1

