

Dome-T

Indoor Lighting - Surface Mounted Lighting



Colour Options



Ral 9016



Ral 9006



Ral 9005

TECHNICAL INFORMATION

Housing	Metal Sheet
Diffuser	High Transmittance Opal Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Symmetrical
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL




Power (W)	29-60W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI	- 1-10V DIM
- Tunable White	- Emergency Lighting Unit
- CRI > 90	- 2700K ~ 6500K
- Different RAL Color Options	- Plug-in Connector
- Class-II Protection Class	- PIR Sensor
- AC-DC Supply(MBS)	

ASSEMBLY

Installation Type	Surface Mounted
Mounting	Screw Dowel Set
Apparatus	

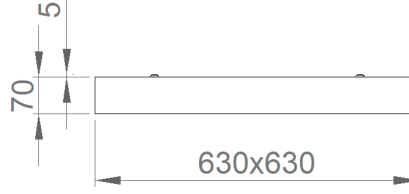

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
03119.66.30.023	29	2320	3000	Ra>80	630x630x70	4,9
03119.66.40.024	29	2450	4000	Ra>80	630x630x70	4,9
03119.66.30.031	41	3170	3000	Ra>80	630x630x70	4,9
03119.66.40.033	41	3360	4000	Ra>80	630x630x70	4,9
03119.66.30.052	60	5280	3000	Ra>80	630x630x70	4,9
03119.66.40.055	60	5600	4000	Ra>80	630x630x70	4,9

