

Luna-T

Indoor Lighting - Downlight Lighting



TECHNICAL INFORMATION

Housing	Electrostatic coated aluminum
Optics	Highly transmissive opal diffuser
LED Lifetime	50.000 hours
L80B50	
Mounting System	Surface

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL




Power (W)	18-23W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Surface Mounted

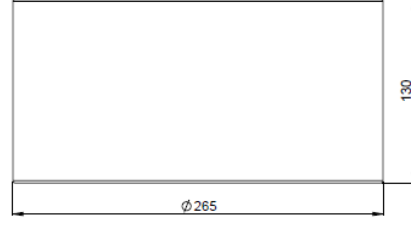

Order Code	W	Lm	CCT	CRI	ØxH (mm)	Kg
03170.24.30.019	19	1560	3000	Ra>80	265x130	1,2
03170.24.40.019	19	1630	4000	Ra>80	265x130	1,2
03170.24.30.029	28	2300	3000	Ra>80	265x130	1,2
03170.24.40.029	28	2400	4000	Ra>80	265x130	1,2

