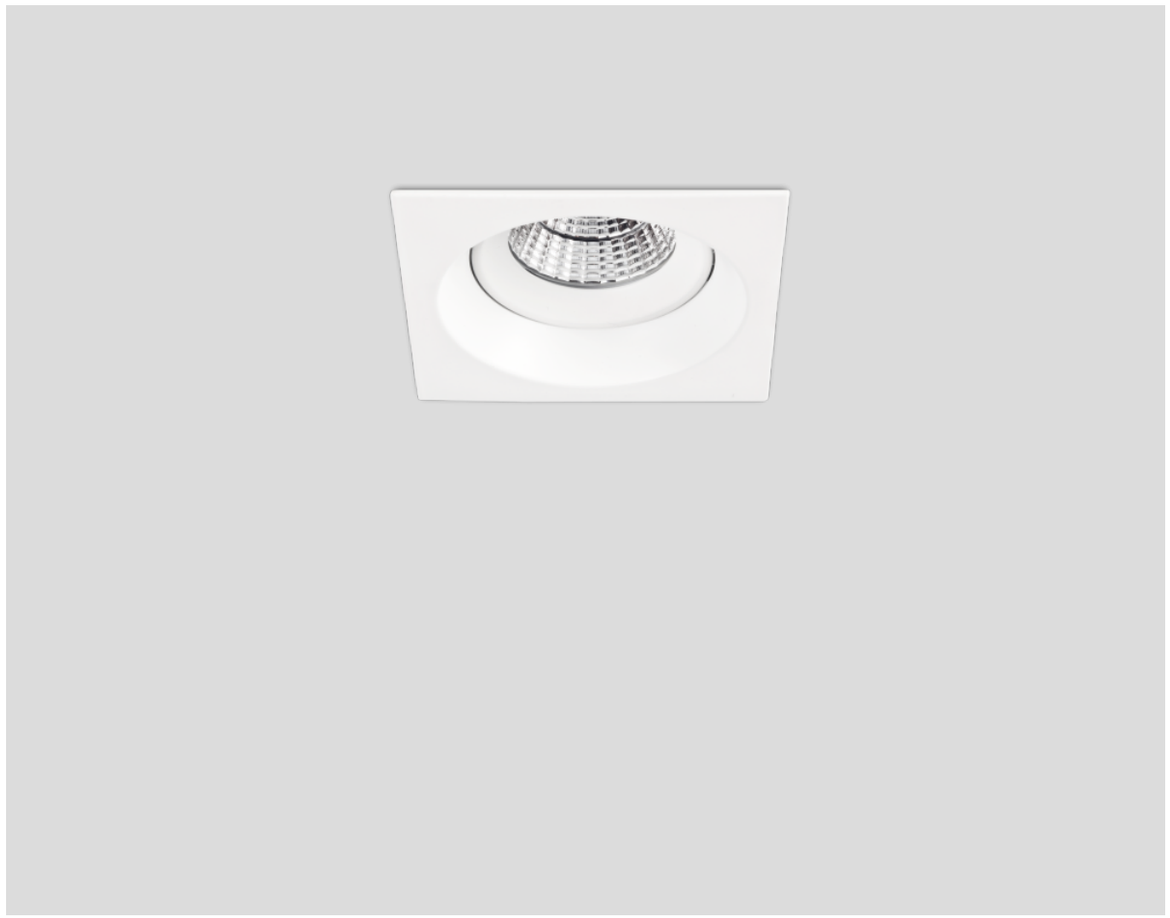


RAL 9016 RAL 9005 RAL 9006


HOLLOW

05318

Adjustable Recessed Square Spotlight

Hollow, thanks to its adjustable optical structure, precisely directs light to where it is needed. Its deeply embedded light source and special optical design significantly reduce glare, offering superior visual comfort.

With its IP44 protection class, highly efficient metallized reflector, and modern design, it provides a high-performance and aesthetically pleasing lighting solution for various indoor projects, from offices and shops to hotels and residential areas.

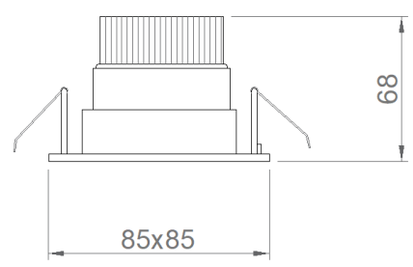

General Information	
Body & Frame	Aluminum Injection
Optics	Polished Reflector + Glass
Paint	Electrostatic Powder Paint
Insulation Class	Class II
Product Dimensions [mm]	85(W)x85(L)x68(H)
Mounting Type	Recessed
Mounting Part	Spring Steel

Electrical Info	
Power	7-10W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	36°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
05318.88.30.007	7	756	36°	3000	85x85x68	75x75	0,20
05318.88.40.007	7	860	36°	4000	85x85x68	75x75	0,20
05318.88.30.011	10	1100	36°	3000	85x85x68	75x75	0,20
05318.88.40.011	10	1160	36°	4000	85x85x68	75x75	0,20

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com