

Wide

Indoor Lighting - Appliques



TECHNICAL INFORMATION

Housing	Electrostatic Powder Coated DKP Sheet
Optics	Opal Diffuser with High Light Transmittance
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Light Distribution	Up&Down
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL



Power (W)	13-26W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

DALI
Emergency Lighting Unit
CRI > 90
2700K ~ 6500K
Class-II Protection Class

ASSEMBLY

Installation Type Surface Mounted

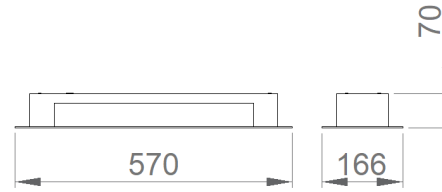

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg	Description
06144.15.30.013	13	1300	3000	Ra>80	166x570x70	3,2	Tek Yön
06144.15.40.014	13	1400	4000	Ra>80	166x570x70	3,2	Tek Yön
06144.15.30.026	26	2600	3000	Ra>80	166x570x70	3,2	Çift Yön
06144.15.40.027	26	2700	4000	Ra>80	166x570x70	3,2	Çift Yön

