

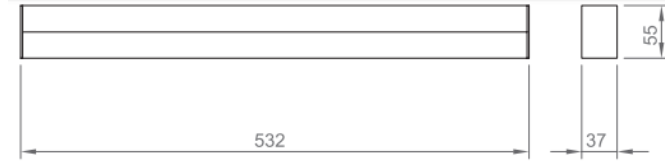


Fine

Indoor Lighting - Appliques



TECHNICAL INFORMATION

Housing	Aluminium profile
Optics	Highly transmissive opal PC diffuser
LED Lifetime	50.000 hours
L80B50	
Mounting System	Surface

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL

Power (W)	10W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

ASSEMBLY

Installation Type Surface Mounted

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
01183.45.30.008	10	800	3000	Ra>80	37x532x55	0,5
01183.45.40.009	10	900	4000	Ra>80	37x532x55	0,5

