

Waterline - IP54

Indoor Lighting - Linear Lighting, Industrial Lighting



TECHNICAL INFORMATION

Housing	Extruded aluminum profile with electrostatic coating
Diffuser	Highly transmissive opal diffuser
LED Lifetime	50.000 hours
L80B50	
Mounting System	Surface / Pendant

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	75°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL





Power (W)	21-62W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Surface Mounted, Pendant

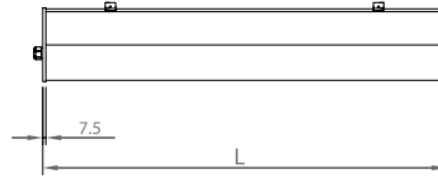

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
01193.81.30.020	21	1800	3000	Ra>80	80x590x100	2,2
01193.81.40.022	21	1900	4000	Ra>80	80x590x100	2,2
01193.81.30.030	31	2650	3000	Ra>80	80x870x100	2,5
01193.81.40.032	31	2790	4000	Ra>80	80x870x100	2,5
01193.81.30.041	42	3600	3000	Ra>80	80x1150x100	2,9
01193.81.40.043	42	3800	4000	Ra>80	80x1150x100	2,9
01193.81.30.052	52	4500	3000	Ra>80	80x1430x100	3,3
01193.81.40.054	52	4770	4000	Ra>80	80x1430x100	3,3
01193.81.30.063	62	5400	3000	Ra>80	80x1710x100	3,8
01193.81.40.065	62	5720	4000	Ra>80	80x1710x100	3,8

