


# Nest Duo - R

Indoor Lighting - Pendant Lighting



## Colour Options

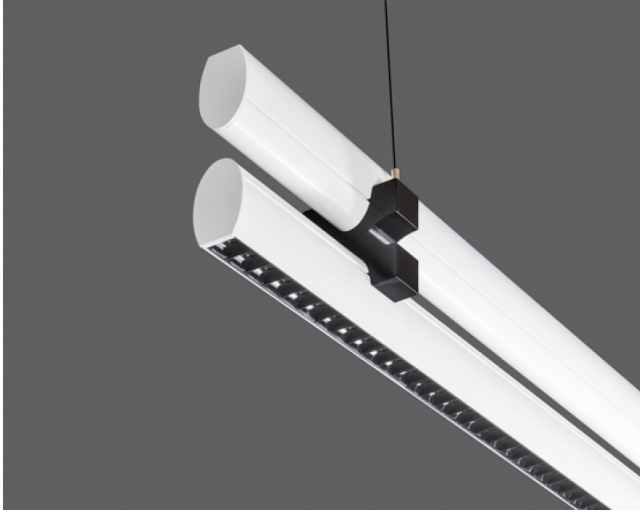

## TECHNICAL INFORMATION

|                                   |                                                                                             |
|-----------------------------------|---------------------------------------------------------------------------------------------|
| <b>Housing</b>                    | Extruded aluminum profile with electrostatic coating                                        |
| <b>Reflector</b>                  | Direct: Aluminum coated, vacuumed PC reflector with glare control , Indirect: Opal diffuser |
| <b>Light Source</b>               | L80B50 High efficacy SMD Mid Power LED with> 50,000 hours lifetime                          |
| <b>Driver</b>                     | Constant current output, Pf> 0.90                                                           |
| <b>Input Voltage/Input Factor</b> | 220-240V / 50-60 Hz                                                                         |
| <b>Working Temperature</b>        | -20C°/+40C°                                                                                 |
| <b>UGR</b>                        | < 17                                                                                        |
| <b>Option</b>                     | Dali                                                                                        |

## OPTICAL SPECIFICATIONS

|                                |                   |
|--------------------------------|-------------------|
| <b>Light Distribution</b>      | Direct - Indirect |
| <b>Light Output Angle</b>      | 36°               |
| <b>UGR Value</b>               | 80                |
| <b>Color Bin Value</b>         | Mc Adams < 3      |
| <b>Color Temperature (CCT)</b> | 3000K/4000K       |

## ELECTRICAL


## OPTIONAL

DALI

## ASSEMBLY

Installation Type Pendant

## Connection

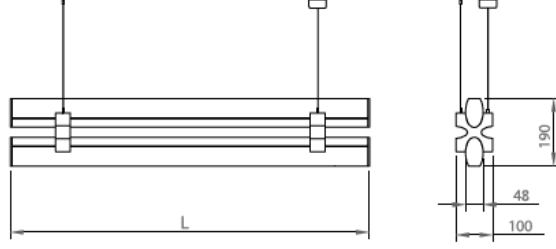

| Order Code      | W  | Lm   | CCT  | Angle | CRI   | L (mm) | Kg  |
|-----------------|----|------|------|-------|-------|--------|-----|
| 01190.11.30.053 | 51 | 5390 | 3000 | 36°   | Ra>80 | 1130   | 3,2 |
| 01190.11.40.057 | 51 | 5700 | 4000 | 36°   | Ra>80 | 1130   | 3,2 |
| 01190.11.30.068 | 60 | 6860 | 3000 | 36°   | Ra>80 | 1440   | 4,1 |
| 01190.11.40.072 | 60 | 7270 | 4000 | 36°   | Ra>80 | 1440   | 4,1 |

