



Snow-019

05393

RAL 9005 RAL 9006

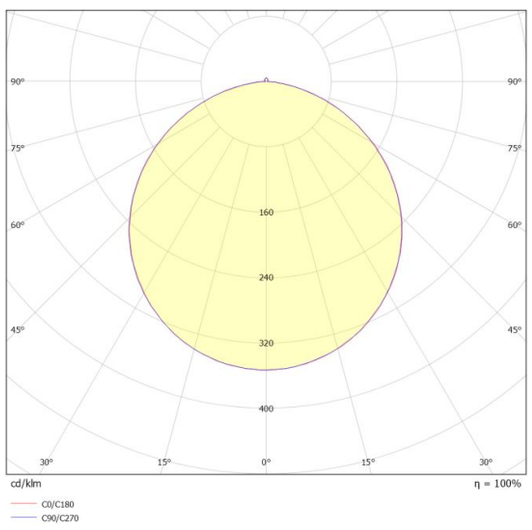

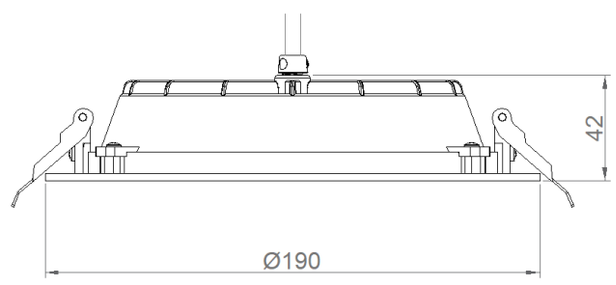

Cut-out : Ø180mm

General Information	
Housing	Aluminum Injection
Diffuser	High Transmittance Opal Diffuser
Frame	Aluminum İnjection
Paint	Electrostatic Powder Paint

Electrical Info	
Power	19W-23W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Optics	Symmetrical
Light Output Angle	110°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Tunable White
Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White
2700K ~ 6500K

Order Code	W	Lm	Productivity	CCT	CRI	ØDx(H)	Cut-out dimensions (mm)	Kg
05393.19.30.020	19	1980	110 lm/W	3000	Ra>80	Ø190x45	180	0,6
05393.19.40.025	19	2200	120 lm/W	4000	Ra>80	Ø190x45	180	0,6
05393.19.30.023	23	2430	110 lm/W	3000	Ra>80	Ø190x45	180	0,6
05393.19.40.026	23	2700	120 lm/W	4000	Ra>80	Ø190x45	180	0,6

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com