




LIGHTLINE 150

01180

Indoor Surface Mounted Linear Luminaire

Lightline 150 Series, with its 150 mm wide profile structure, creates a powerful lighting effect and a strong architectural emphasis in large-scale spaces. Its opal diffuser provides homogeneous light distribution and a wide illuminated surface, delivering a fuller and more distinctive linear lighting effect within the space.

With its aluminum body and wide profile design, Lightline 150 stands out as a strong design element, especially in modern office, commercial and architectural projects. Offering various color temperature and control options, the Lightline 150 Series adapts to project-specific lighting scenarios, while its suspended and surface-mounted installation alternatives provide flexible solutions for different application needs.

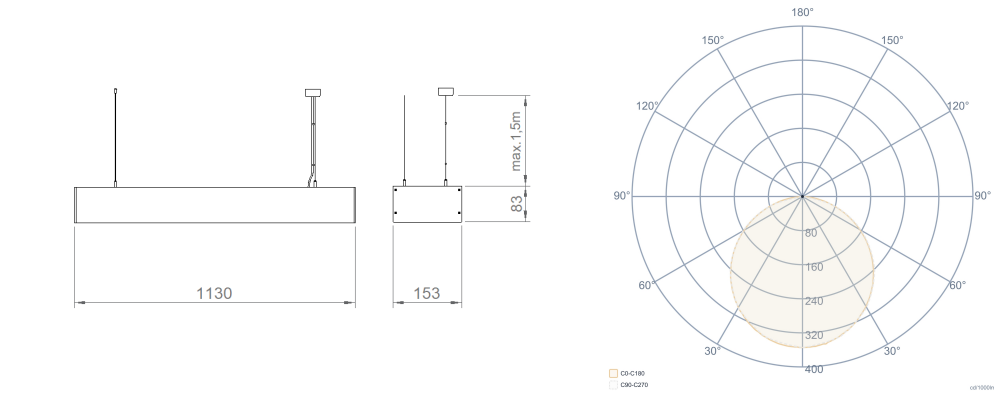

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Extruded	Power	39W-45W	Light Output Angle	120°
Side Cover	Metal Cover	Power Factor	>0.95	UGR Value	UGR ≤ 22
Optics	Opal Diffuser	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Paint	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	153(W) x 83(H)	LED Driver	Constant Current		
Mounting Type	Surface and Pendant	Ambient Temperature	-20°C / +50°C		
Mounting Part	Height Adjustable Steel Wire	LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	L (mm)	Kg
01180.18.30.038	39	3860	3000	1130	3,80
01180.18.40.040	39	4100	4000	1130	3,80
01180.18.30.043	45	4360	3000	1130	3,80
01180.18.40.045	45	4670	4000	1130	3,80

