

Lightline-150

Indoor Lighting - Linear Lighting, Surface Mounted Lighting



Colour Options

 Ral 9016
  Ral 9006
  Ral 9005

TECHNICAL INFORMATION

Housing Extruded Aluminum Profile
Side Cover Metal Cover
Diffuser Highly Transmissive Opal Diffuser
Paint Electrostatic Powder Paint
Dimensions(mm) 153(W) x 83(H)

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL



Power (W) 39-45W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-II Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Energy Input Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Surface Mounted, Pendant
Mounting Apparatus Height Adjustable Steel Wire

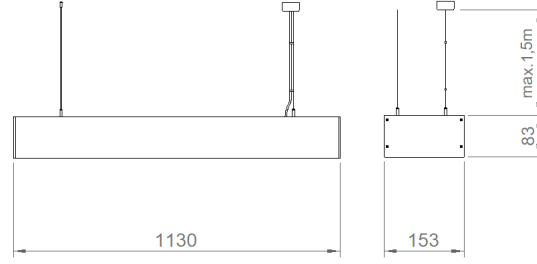

Order Code	W	Lm	CCT	CRI	L (mm)	Kg
01180.18.40.045	45	4670	4000	Ra>80	1130	3,8

