

TETRAD


05348


Modular Lighting Specifically Designed for Honeycomb Ceilings

Tetrad is a lighting solution developed for open-cell (honeycomb) ceiling systems, compatible with ceiling modules. Its metal sheet body allows for production according to different honeycomb sizes, offering an aesthetically pleasing look that integrates seamlessly with the ceiling geometry. Tetrad 060 and Tetrad 085 models are available in single, double, and quadruple module options, meeting different light levels and design needs.

Designed for use in offices, educational buildings, social areas, corridors, and commercial projects, Tetrad goes beyond standard solutions with its customizable size, adapting to project-specific applications. With its modern design, modular structure, and flexible size options, it offers a functional and aesthetic lighting solution for honeycomb ceiling systems.

RAL 9016 RAL 9005 RAL 9006

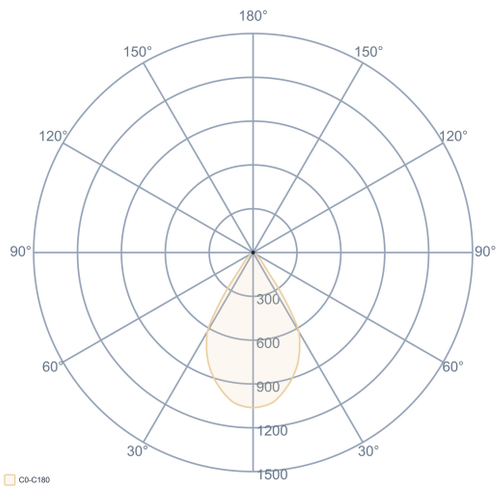

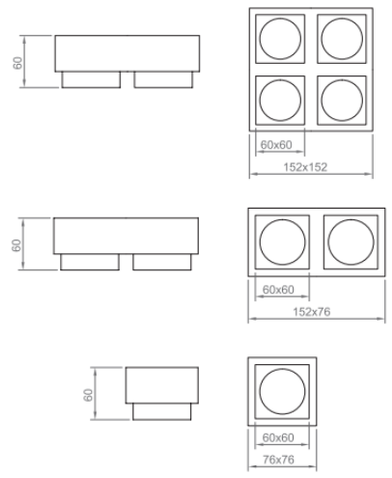

General Information		Electrical Info		Lighting Technology	
Housing	DKP Metal sheet	**Power**	3,5-14W	**Light Output Angle**	110°
Optics	Opal Diffuser	**Power Factor**	>0.95	**UGR Value**	UGR ≤ 22
Paint	Electrostatic Powder Coating	**Light Source**	SMD Mid Power LED	**CRI [Ra]**	CRI ≥ 80
Insulation Class	Class I	**Cabling**	Halojen-Free	**Color Bin Value**	Mc Adams ≤ 3
Mounting Type	Grid Ceiling	**Input Voltage**	220-240V AC / 50-60 Hz		
		LED Driver	Constant Current		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>102.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Product Type	Kg
05348.22.30.002	3,5	250	110º	3000	76x76x60	1x1-060	0,20
05348.22.40.002	3,5	260	110º	4000	76x76x60	1x1-060	0,20
05348.22.30.005	7	500	110º	3000	152x76x60	2x1-060	0,30
05348.22.40.005	7	520	110º	4000	152x76x60	2x1-060	0,30
05348.22.30.010	14	1000	110º	3000	152x152x60	2x2-060	0,50
05348.22.40.010	14	1040	110º	4000	152x152x60	2x2-060	0,50
05348.11.30.001	3,5	100	110º	3000	101x101x60	1x1-085	0,2
05348.11.40.001	3,5	200	110º	4000	101x101x60	1x1-085	0,2
05348.12.40.005	7	400	110º	3000	101x201x60	2x1-085	0,4
05348.12.30.004	7	500	110º	4000	101x201x60	2x1-085	0,4
05348.22.30.009	14	900	110º	3000	202x202x60	2x2-085	0,9
05348.22.40.012	14	1000	110º	4000	202x202x60	2x2-085	0,9

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

Please visit our website for our updated information. www.ikizleraydinlatma.com

+90 (216) 397 22 16
info@ikizleraydinlatma.com