Coral-M

- Projector

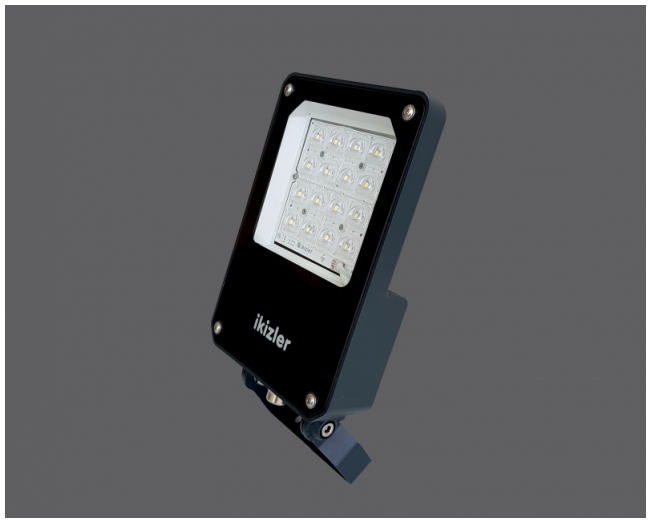

Colour Options

Ral 7016

TECHNICAL INFORMATION

Housing	Die-cast Aluminum Body
Optics	Acrylic Optical Lens for Projector/Tunnel Lighting
Glass	Tempered, Clear Glass Diffuser
Paint	Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics	Asymmetrical
Light Output Angle	60°-120°
UGR Value	UGR ≤ 22
CRI	CRI ≥ 70
Color Bin Value	Mc Adams ≤ 3

ELECTRICAL

Power (W)	26-40W
Power Factor	>0.95
Light Source	SMD High Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L80B50	>50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-I Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type	Surface Mounted
Mounting Apparatus	Metal Console

IK 08 | RoHS COMPLIANT | IP 66

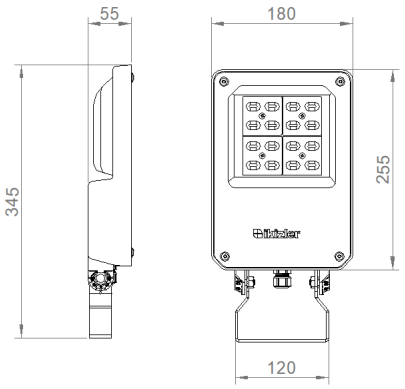



30° Beam Angle

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Kg
09294.23.30.030	26	3070	3000	Ra>70	180x345x55	2,4
09294.23.40.032	26	3200	4000	Ra>70	180x345x55	2,4
09294.23.30.038	34	3840	3000	Ra>70	180x345x55	2,4
09294.23.40.040	34	4000	4000	Ra>70	180x345x55	2,4
09294.23.30.043	40	4610	3000	Ra>70	180x345x55	2,4
09294.23.40.045	40	5480	4000	Ra>70	180x345x55	2,4

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com