



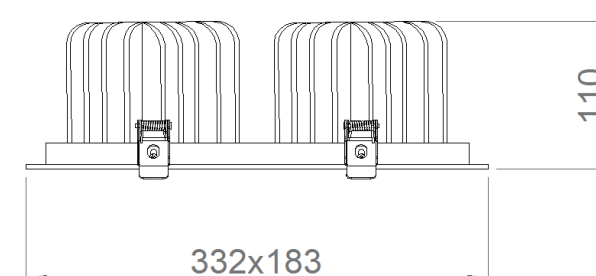

RAL 9005 RAL 9006

Adella-K2
52682

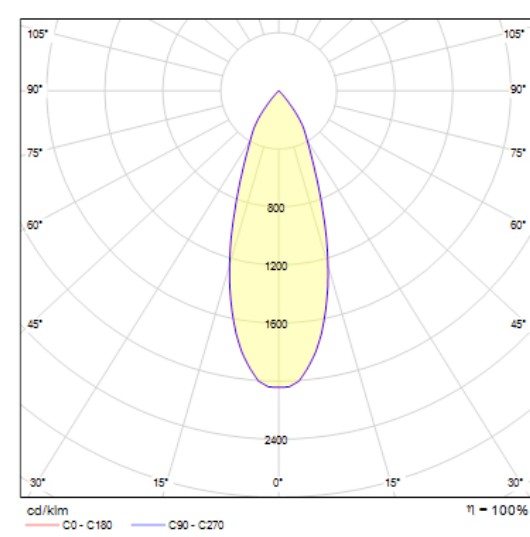

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum Injection	Power	26-68W	Optics	Symmetrical
Frame		Power Factor	>0.95	Light Output Angle	30°
Reflector	Aluminum Injection	Light Source	COB LED	UGR Value	UGR < 22
Paint	Metallized Surface Optical Reflector + Glass	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
		LED Driver	Yüksek Verimli Sabit Akım Çıkışlı	Optional	
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	1-10V DIM
				Tunable White	Emergency Lighting Unit
				CRI>90 , 2700K~6500K , Tunable White	2700K ~ 6500K
				Different RAL Color Options	Plug-in Energy Input Control
				Class-I Protection Class	AC-DC Supply(MBS)

Order Code	W	Lm	Angle	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
52682.13.30.047	52	4700	30°	3000	Ra>80	332x183x110	160x305	1,2
52682.13.40.051	52	5100	30°	4000	Ra>80	332x183x110	160x305	1,2
52682.13.30.059	70	5900	30°	3000	Ra>80	332x183x110	160x305	1,2
52682.13.40.065	70	6500	30°	4000	Ra>80	332x183x110	160x305	1,2