

Adella-K2

52682

RAL 9005 RAL 9006

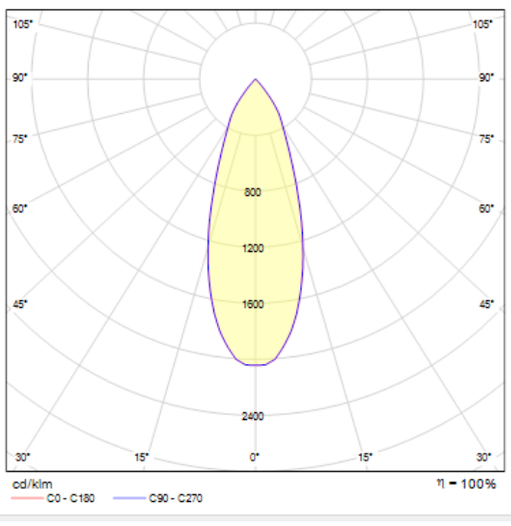

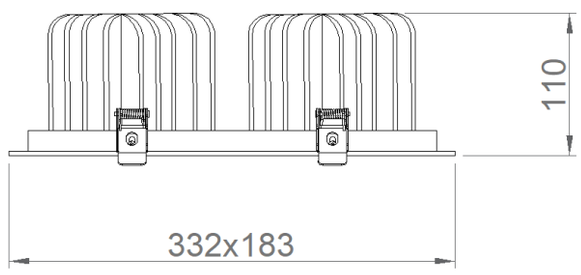

General Information	
Housing	Aluminum Injection
Frame	
Reflector	Aluminum Injection
Paint	Metallized Surface Optical Reflector + Glass

Electrical Info	
Power	26-68W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Yüksek Verimli Sabit Akım Çıkışlı
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Optics	Symmetrical
Light Output Angle	30°
UGR Value	UGR < 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional	
DALI / 1-10V	1-10V DIM
Tunable White	Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White	2700K ~ 6500K
Different RAL Color Options	Plug-in Energy Input Con
Class-I Protection Class	AC-DC Supply(MBS)

Order Code	W	Lm	Angle	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
52682.13.30.047	52	4700	30°	3000	Ra>80	332x183x110	160x305	1,2
52682.13.40.051	52	5100	30°	4000	Ra>80	332x183x110	160x305	1,2
52682.13.30.059	70	5900	30°	3000	Ra>80	332x183x110	160x305	1,2
52682.13.40.065	70	6500	30°	4000	Ra>80	332x183x110	160x305	1,2

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com