



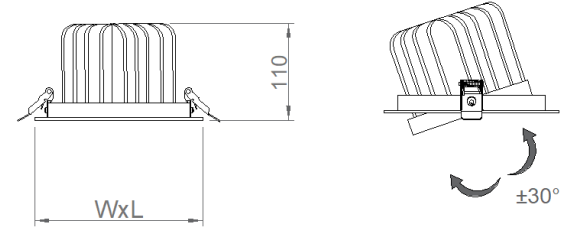

RAL 9016 RAL 9005 RAL 9006

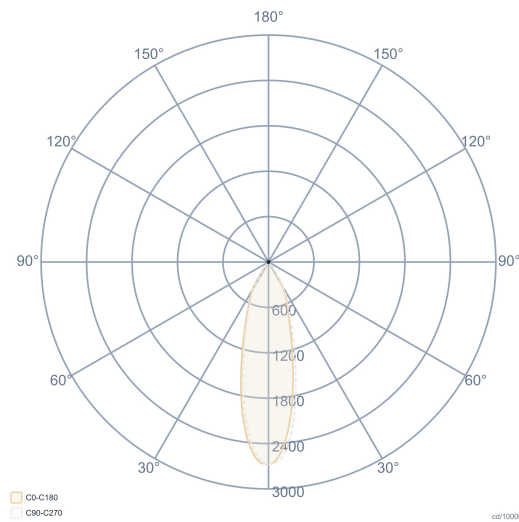

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	Power	26-35W	Light Output Angle	30°
Optics	Polished Reflector + Glass	Power Factor	>0.95	UGR Value	UGR < 22
Paint	Electrostatic Powder Coating	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class II	Cabling	Halojen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	183(W)x183/332(L)x110(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Steel Spring	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
52682.11.30.023	26	2300	30°	3000	183x183x110	160x160	0,60
52682.11.40.025	26	2600	30°	4000	183x183x110	160x160	0,60
52682.11.30.030	35	3000	30°	3000	183x183x110	160x160	0,60
52682.11.40.033	35	3500	30°	4000	183x183x110	160x160	0,60
52682.13.30.047	52	4700	30°	3000	332x183x110	160x305	1,20
52682.13.40.051	52	5100	30°	4000	332x183x110	160x305	1,20
52682.13.30.059	70	5900	30°	3000	332x183x110	160x305	1,20
52682.13.40.065	70	6500	30°	4000	332x183x110	160x305	1,20

