ADELLA-K

52682

Adjustable Square Spot Fixture

The Adella-K Series offers high durability and effective heat management thanks to its aluminum injection molded body and frame structure. With K1 and K2 module options, it adapts to different lighting needs, while its adjustable spotlight structure, which can move around its own axis, allows for precise light targeting.

Ideal for shops, offices, hotels, galleries, and commercial spaces, Adella-K combines aesthetics and performance in accent and general lighting applications with its various light angles and color temperature options.

RAL 9016 RAL 9005 RAL 9006





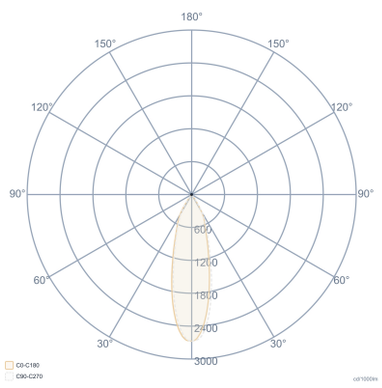

General Information		Electrical Info		Lighting Technology	
Body & Frame	Aluminum Injection	**Power**	26-35W	**Light Output Angle**	30°
Optics	Polished Reflector + Glass	**Power Factor**	>0.95	**UGR Value**	UGR < 22
Paint	Electrostatic Powder Coating	**Light Source**	COB LED	**CRI [Ra]**	CRI ≥ 80
Insulation Class	Class II	**Cabling**	Halojen-Free	**Color Bin Value**	Mc Adams ≤ 3
Product Dimensions [mm]	183(W)x183/332(L)x110(H)	**Input Voltage**	220-240V AC / 50-60 Hz		
Mounting Type	Recessed	**LED Driver**	Constant Current		
Mounting Part	Steel Spring	**Ambient Temperature**	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	Angle	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
52682.13.30.047	52	4700	30°	3000	332x183x110	160x305	1,20

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com