





BEAM-S

06602

Simple Form, Unidirectional Light

Beam-S is an outdoor LED wall sconce that can be mounted on wall surfaces. Its modern cylindrical design and simple appearance offer an aesthetic lighting solution that highlights architectural details in residential, hotel, commercial building, and landscape projects. Offering high light quality with COB LED technology, Beam-S provides long-lasting and reliable performance in challenging outdoor conditions thanks to its aluminum profile and injection molded body, electrostatically powder-coated surface, and IP65 protection class.

It creates accent lighting on facades, columns, entrances, landscape elements, and architectural surfaces. Available in black, white, and anthracite, it adapts to different architectural concepts, combining aesthetics and functionality.

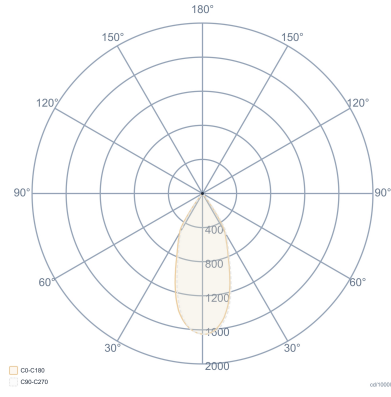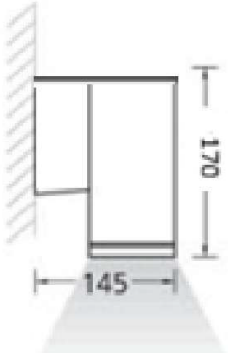

General Information		Electrical Info		Lighting Technology	
Housing	Cast Aluminum	Power	8-12W	Light Output Angle	43°
Optics	Polished Reflector	Power Factor	>0.95	UGR Value	UGR ≤ 25
Glass	Tempered, Clear Glass	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coating	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	
Product Dimensions [mm]	Ø90x180(H)x135(L)	LED Driver	Constant Current		
Mounting Type	Surface	Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				CRI>90 , 2700K~6500K , Tunable White	
				Emergency Lighting Unit	

Order Code	W	Lm	CCT	ØxHxL (mm)	Kg
06602.91.30.011	13	825	3000	90x180x135	1,60
06602.91.40.012	13	850	4000	90x180x135	1,60

