





BEAM-T

05260

Beam T is a surface-mounted LED wall sconce developed for outdoor applications, with a compact design that complements modern architecture. With a diameter of Ø90mm and height options of 90mm and 160mm, it provides aesthetic compatibility with different facades and architectural details. Its unidirectional light distribution creates homogeneous lighting around facades, entrances, columns, walkways, and building perimeters. COB LED technology ensures high light quality, while its die-cast aluminum housing provides a long-lasting and durable structure. With an IP65 protection rating, it is resistant to rain, humidity, and dust. Available in black, white, and anthracite colors to match various architectural concepts. Its minimal dimensions and simple design make it an ideal outdoor lighting solution for residential, hotel, commercial building, and landscape projects.

Beam T is a surface-mounted LED wall sconce developed for outdoor applications, with a compact design that complements modern architecture. With a diameter of Ø90mm and height options of 90mm and 160mm, it provides aesthetic compatibility with different facades and architectural details. Its unidirectional light distribution creates homogeneous lighting around facades, entrances, columns, walkways, and building perimeters. COB LED technology ensures high light quality, while its die-cast aluminum housing provides a long-lasting and durable structure.

With an IP65 protection rating, it is resistant to rain, humidity, and dust. Available in black, white, and anthracite colors to match various architectural concepts. Its minimal dimensions and simple design make it an ideal outdoor lighting solution for residential, hotel, commercial building, and landscape projects.

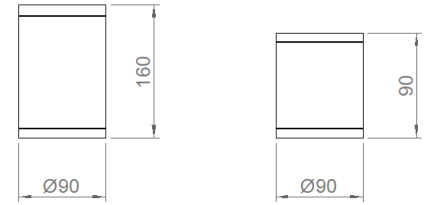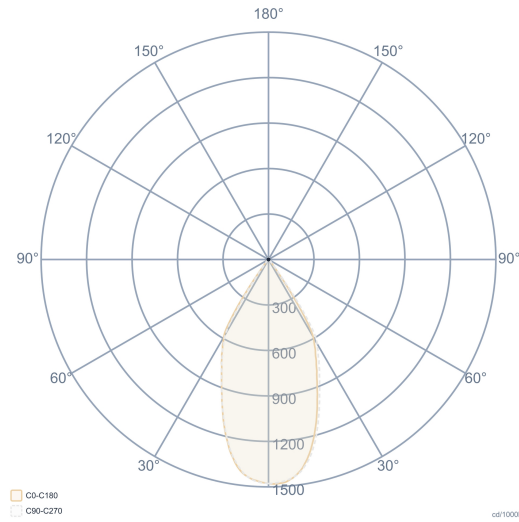

General Information		Electrical Info		Lighting Technology	
Housing	Aluminum and Injection	Power	8-12W	Light Output Angle	43°
Optics	Polished Reflector	Power Factor	>0.95	UGR Value	UGR ≤ 25
Glass	Tempered, Clear Glass	Light Source	COB LED	CRI [Ra]	CRI ≥ 80
Paint	Electrostatic Powder Coated	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Insulation Class	Class I	Input Voltage	220-240V AC / 50-60 Hz	Optional	DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White
Product Dimensions [mm]	Ø90x138(H)	LED Driver	Constant Current		
		Ambient Temperature	-25°C/+50°C		
Mounting Type	Surface	LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	ØD x H (mm)	Kg
05260.90.30.011	12	800	3000	90x138	0,65
05260.90.40.012	12	820	4000	90x138	0,65

