

Potent

Indoor Lighting - Industrial Lighting



TECHNICAL INFORMATION

Housing	Die-cast aluminum with electrostatic coating
Optics	Clear optical lens
Glass	Tempered and clear
LED Lifetime	50.000 hours
L80B50	
Mounting System	Surface

OPTICAL SPECIFICATIONS

Light Distribution	Symmetrical
Light Output Angle	120°
UGR Value	80
Color Bin Value	Mc Adams < 3
Color Temperature (CCT)	3000K/4000K

ELECTRICAL





Power (W)	60-120W
Power Factor	>95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V / 50-60 Hz

OPTIONAL

DALI
Emergency Lighting Unit

ASSEMBLY

Installation Type Surface Mounted

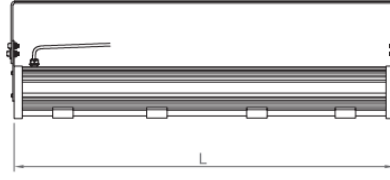

Order Code	W	Lm	Lm	CRI	WxLxHxH2 (mm)	Kg
07303.03.30.060	60	6300	3000	Ra>80	155x370x80x188	3,3
07303.03.40.070	60	7000	4000	Ra>80	155x370x80x188	3,3
07303.03.30.099	90	9900	3000	Ra>80	155x370x80x188	3,3
07303.03.40.108	90	10800	4000	Ra>80	155x370x80x188	3,3
07303.06.30.132	120	13200	3000	Ra>80	155x600x80x188	4,9
07303.06.40.144	120	14400	4000	Ra>80	155x600x80x188	4,9

