






Darkpit-118 051111



RAL 9005 RAL 9006

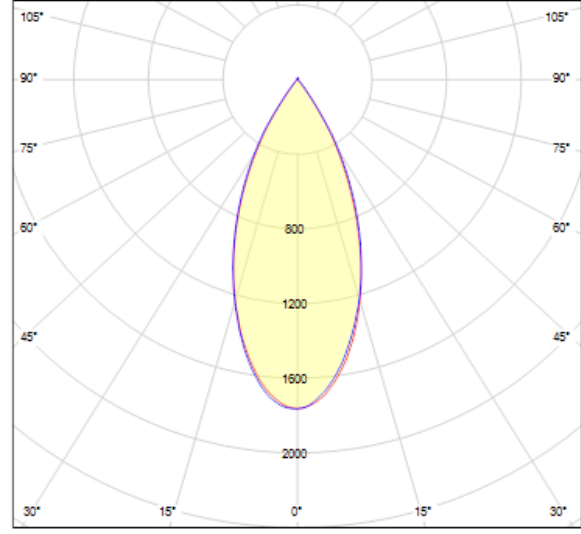

General Information		Electrical Info		Lighting Technology	
Housing	Extruded Aluminum Profile + Metal Sheet	Power	14W	Optics	Symmetrical
Frame		Power Factor	>0.95	Light Output Angle	45°
Reflector	Metal Sheet	Light Source	COB LED	UGR Value	UGR ≤ 19
Paint	Anti-Glare Black Reflector	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
		LED Driver	High Efficiency Constant Current Output		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
Optional					
DALI / 1-10V					
Tunable White					
Emergency Lighting Unit					
CRI>90 , 2700K~6500K , Tunable White					
2700K ~ 6500K					

Order Code	W	Lm	Angle	CCT	CRI	ØD x H (mm)	Cut-out dimensions (mm)	Kg
05111.11.30.015	14	1370	45°	3000	Ra>80	118x102	Ø105	0,5
05111.11.40.015	14	1440	45°	4000	Ra>80	118x102	Ø105	0,5

