



05111

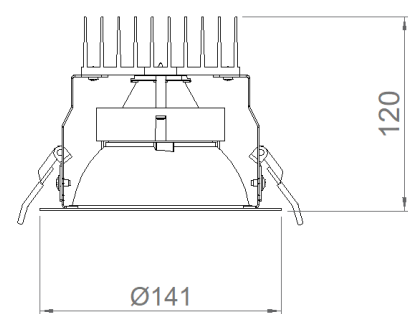

RAL 9005 RAL 9006

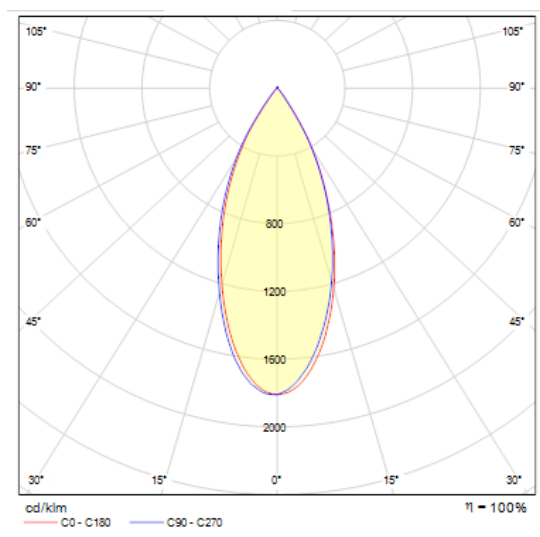

General Information		Electrical Info		Lighting Technology	
Housing	Extruded Aluminum Profile + Metal Sheet	Power	19W	Optics	Symmetrical
Frame		Power Factor	>0.95	Light Output Angle	45°
Reflector	Metal Sheet	Light Source	COB LED	UGR Value	UGR ≤ 19
Paint	Anti-Glare Black Reflector	Cabling	Halojen-Free	CRI [Ra]	CRI ≥ 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
		LED Driver	High Efficiency Constant Current Output		
		Ambient Temperature	-20°C / +50°C	Optional	
		LED Lifetime L70	>50.000 Hour		
				DALI / 1-10V	
				1-10V DIM	
				Tunable White	
				Emergency Lighting Unit	
				CRI>90 , 2700K~6500K , Tunable White	
				2700K ~ 6500K	
				Different RAL Color Options	
				Plug-in Energy Input Cor	
				Class-I Protection Class	
				AC-DC Supply(MBS)	

Order Code	W	Lm	Angle	CCT	CRI	ØD x H (mm)	Cut-out dimensions (mm)	Kg
05111.14.30.023	19	1850	45°	3000	Ra>80	141x120	Ø130	0,6
05111.14.40.023	19	1990	45°	4000	Ra>80	141x120	Ø130	0,6