



Silverpit-118

05113

RAL 9005 RAL 9006

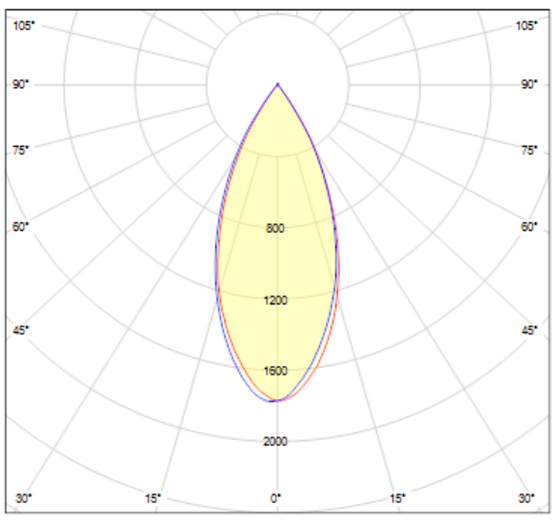



General Information	
Housing	Extruded Aluminum Profile + Metal Sheet
Frame	
Reflector	Metal Sheet
Paint	Anti-Glare Silver Reflector

Electrical Info	
Power	14W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	High Efficiency Constant Current Output
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>50.000 Hour

Lighting Technology	
Optics	Symmetrical
Light Output Angle	45°
UGR Value	UGR ≤ 16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
Tunable White
Emergency Lighting Unit
CRI>90 , 2700K~6500K , Tunable White
2700K ~ 6500K

Order Code	W	Lm	Angle	CCT	CRI	ØD x H (mm)	Cut-out dimensions (mm)	Kg
05113.11.30.014	14	1400	45°	3000	Ra>80	118x102	Ø105	0,5
05113.11.40.015	14	1500	45°	4000	Ra>80	118x102	Ø105	0,5

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com