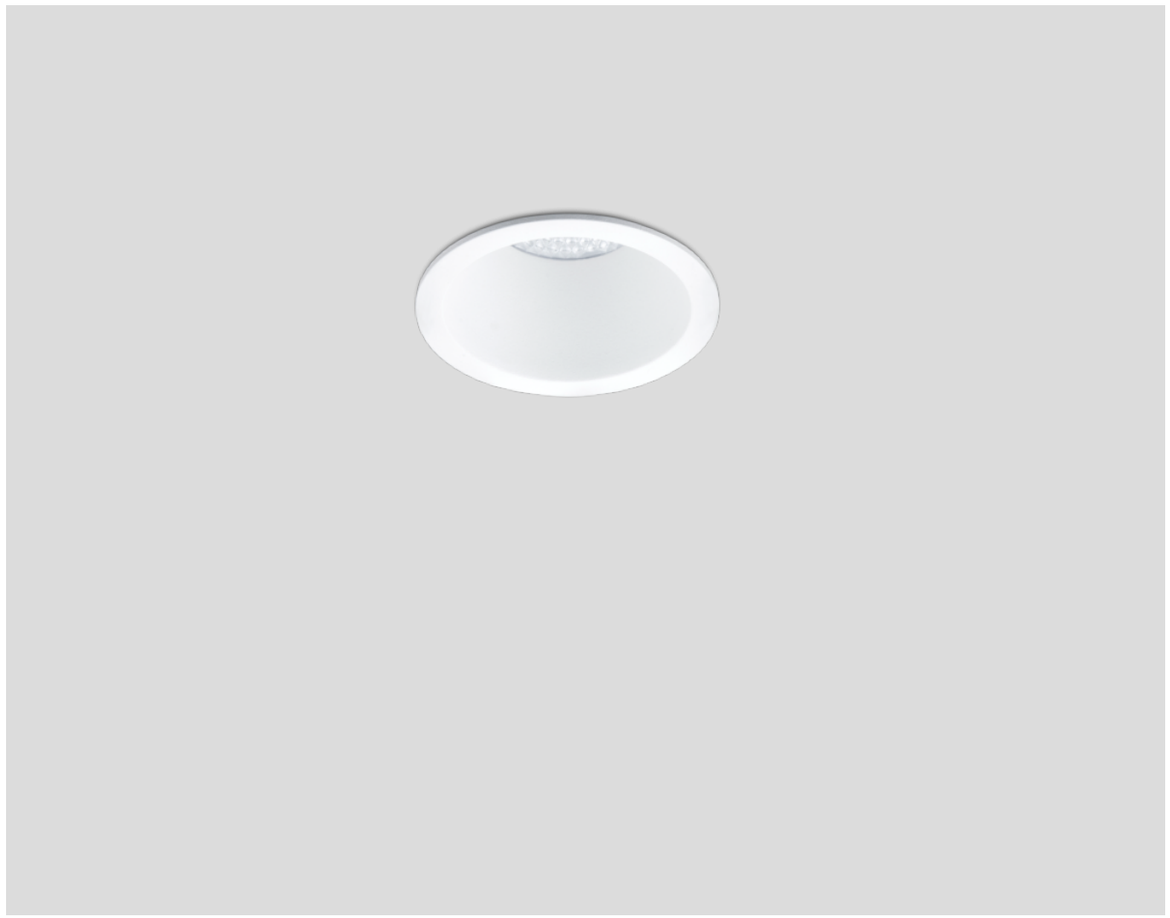


RAL 9016 RAL 9005 RAL 9006

MINO

05112


Glass Protected Spot Lighting Fixture


The MINO Series is a professional spotlight solution offering high visual comfort thanks to its internally located optical structure, metallized reflector, and transparent acrylic protected system. With a glare value of UGR≤16, it reduces direct visibility of the light source, providing comfortable and controlled lighting.

The aluminum injection-molded body and frame structure give the product high durability and a long lifespan, while its simple design blends seamlessly with modern architectural projects. Its optical structure provides effective results in accent and general lighting applications.

Developed for use in offices, shops, hotels, educational buildings, and commercial spaces, the MINO Series offers an ideal solution for architectural projects with its aesthetic appearance, low glare, and high performance.

CE IK 03 GLOW WIRE 650°C IP 44 RoHS COMPLIANT

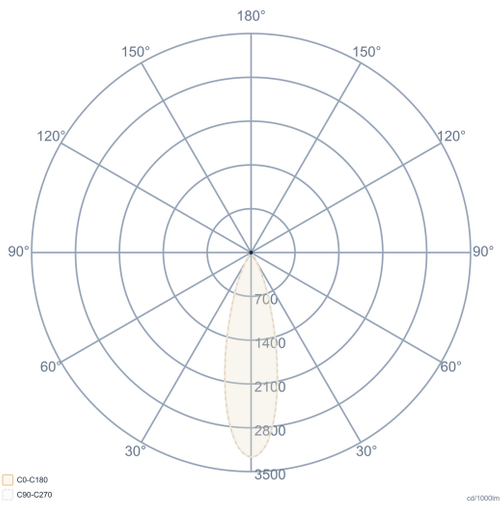

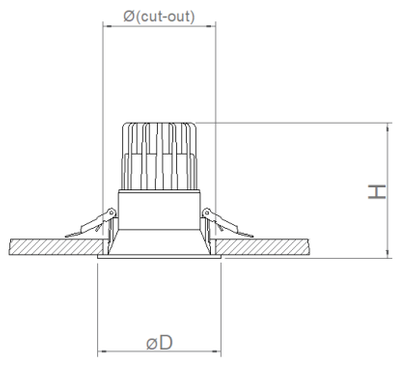

General Information	
Body & Frame	Aluminum Injection
Optics	Transparent Acrylic + Lens + Reflector
Paint	Electrostatic Powder Paint
Insulation Class	Class II
Product Dimensions [mm]	Ø60/Ø82/Ø100x66/84/110(H)
Mounting Type	Recessed
Mounting Part	Steel Spring

Electrical Info	
Power	6W-20W
Power Factor	>0.95
Light Source	COB LED
Cabling	Halojen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	32°
UGR Value	UGR ≤ 16
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White

Order Code	W	Lm	Angle	CCT	ØD x H (mm)	Ceiling Cutting (mm)	Kg
05112.06.30.006	6	450	32°	3000	Ø60x66	Ø55	0,10
05112.06.40.006	6	500	32°	4000	Ø60x66	Ø55	0,10
05112.08.30.006	7	670	32°	3000	Ø82x84	Ø75	0,20
05112.08.40.007	7	700	32°	4000	Ø82x84	Ø75	0,20
05112.08.30.009	10	1000	32°	3000	Ø82x84	Ø75	0,20
05112.08.40.010	10	1050	32°	4000	Ø82x84	Ø75	0,20
05112.10.30.011	12	1270	32°	3000	Ø100x110	Ø90	0,30
05112.10.40.012	12	1340	32°	4000	Ø100x110	Ø90	0,30
05112.10.30.014	15	1470	32°	3000	Ø100x110	Ø90	0,30
05112.10.40.015	15	1550	32°	4000	Ø100x110	Ø90	0,30
05112.10.30.018	20	1850	32°	3000	Ø100x110	Ø90	0,30
05112.10.40.019	20	1950	32°	4000	Ø100x110	Ø90	0,30

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com