
ikizler
"worth the light"

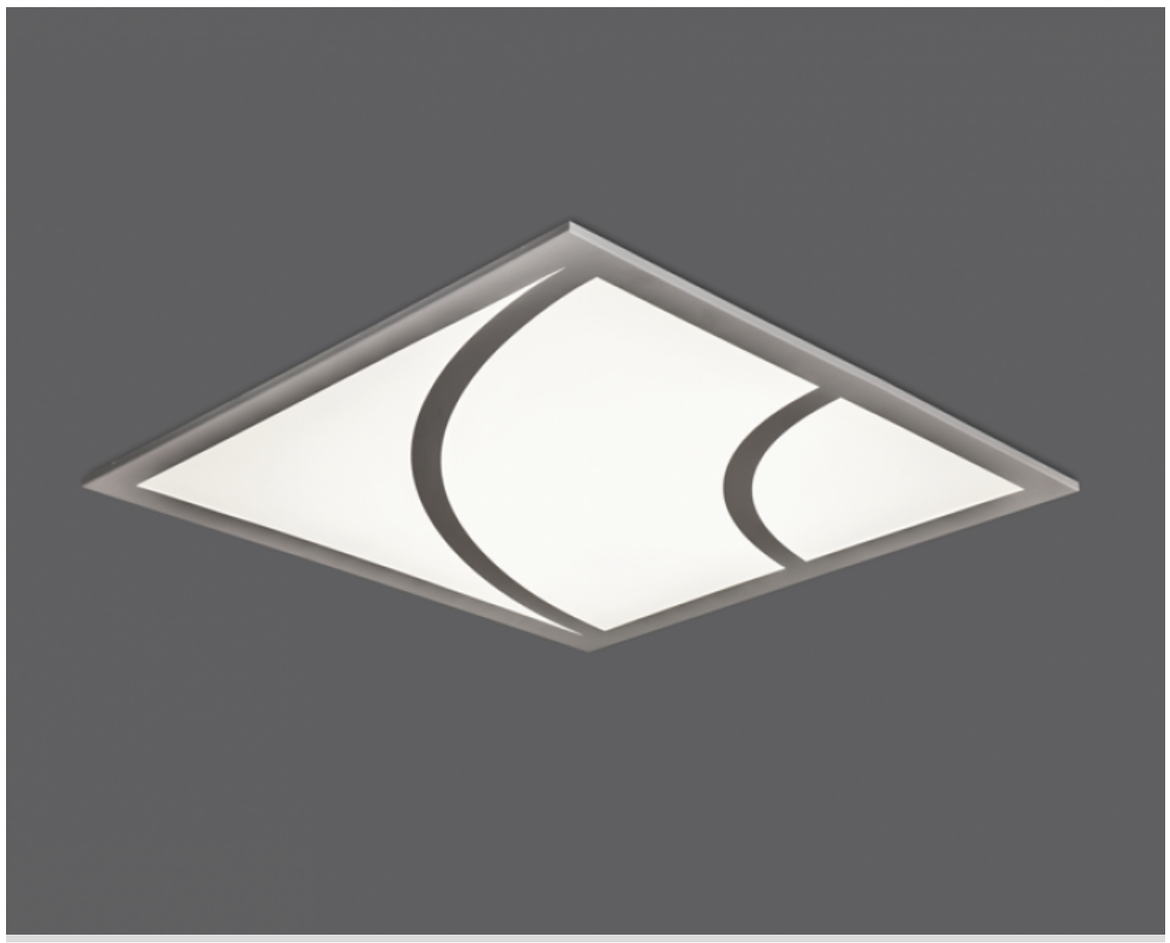



# Ring

## 02170

CE | IK 02 | GLOW WIRE 650°C | IP 40 | RoHS COMPLIANT

RAL 9005 RAL 9006

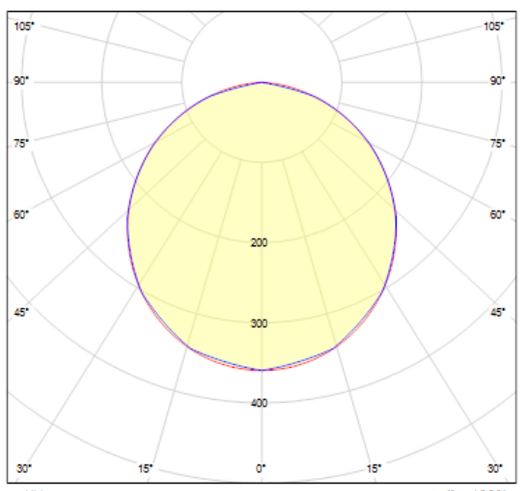

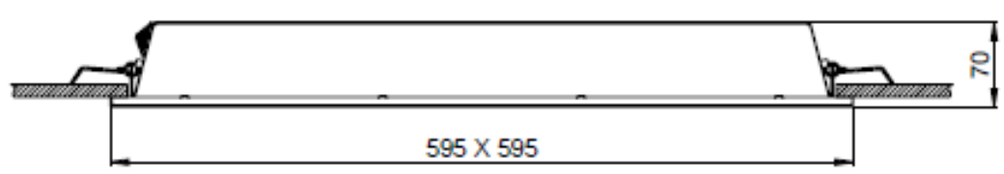
| General Information | |
|---|---|
| **Body & Frame** | Metal Sheet |
| **Diffuser** | High Transmittance Opal Diffuser |
| **Paint** | Electrostatic Powder Paint |

| Electrical Info | |
|---|---|
| **Power** | 28W |
| **Power Factor** | >0.95 |
| **Light Source** | SMD Mid Power LED |
| **Cabling** | Halogen-Free |
| **Input Voltage** | 220-240V AC / 50-60 Hz |
| **LED Driver** | High Efficiency Constant Current Output |
| **Ambient Temperature** | -20°C / +50°C |
| **LED Lifetime L70** | >50.000 Hour |

| Lighting Technology | |
|---|---|
| **Optics** | Symmetrical |
| **Light Output Angle** | 110° |
| **UGR Value** | UGR ≤ 22 |
| **CRI [Ra]** | CRI ≥ 80 |
| **Color Bin Value** | Mc Adams ≤ 3 |

| Optional | |
|---|---|
| DALI / 1-10V | 1-10V DIM |
| Tunable White | Emergency Lighting Unit |
| CRI>90 , 2700K~6500K , Tunable White | 2700K ~ 6500K |
| Different RAL Color Options | Plug-in Energy Input Con |
| Class-II Protection Class | PIR Sensor |
| AC-DC Supply(MBS) | |

| Order Code | W | Lm | Lm | CRI | WxLxH (mm) | Ceiling Cutting (mm) | Kg |
|---|---|---|---|---|---|---|---|
| 02170.66.30.030 | 28 | 2546 | 3000 | Ra>80 | 595x595x65 | 575x575 | 3,0 |
| 02170.66.40.031 | 28 | 2680 | 4000 | Ra>80 | 595x595x65 | 575x575 | 3,0 |

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.



+90 (216) 397 22 16
info@ikizleraydinlatma.com