

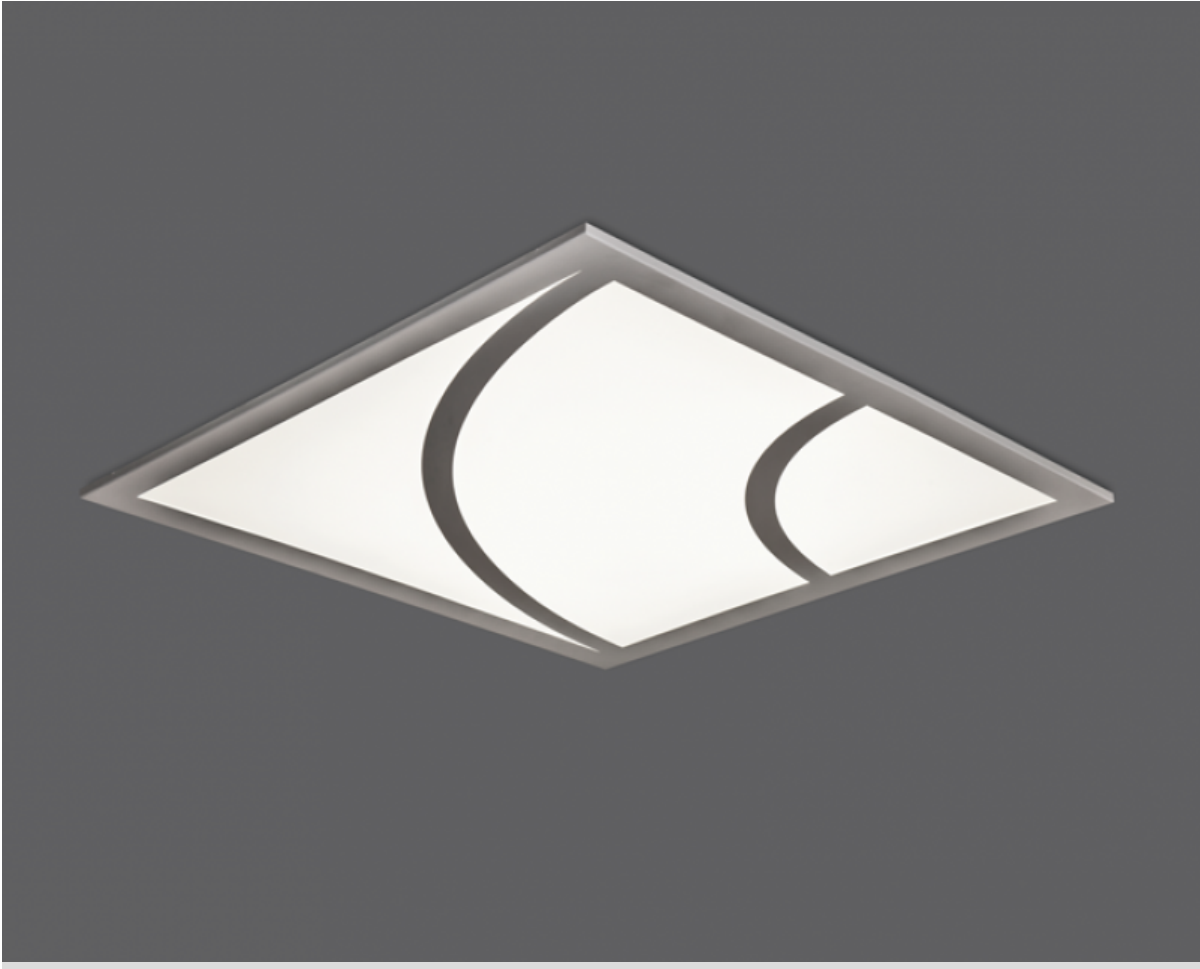


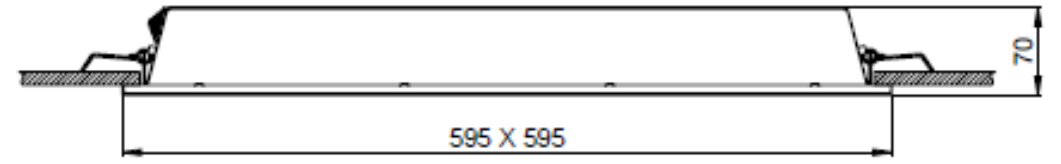

RAL 9005 RAL 9006

Ring 02170

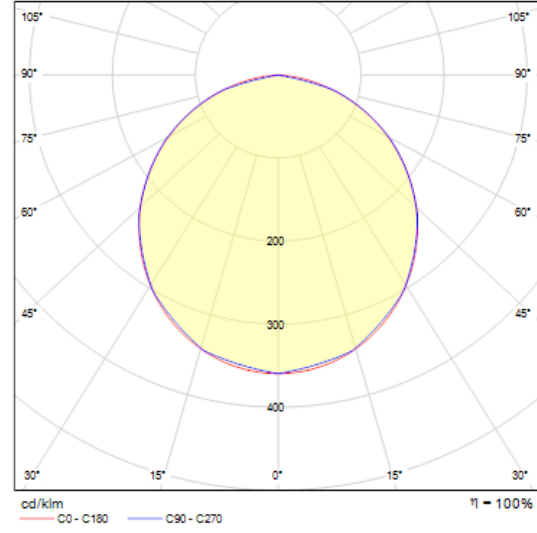

General Information		Electrical Info		Lighting Technology	
Body & Frame	Metal Sheet	Power	28W	Optics	Symmetrical
Diffuser	High Transmittance Opal Diffuser	Power Factor	>0.95	Light Output Angle	110°
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	UGR Value	UGR ≤ 22
		Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
		LED Driver	High Efficiency Constant Current Output		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour		
Optional					
			DALI / 1-10V	1-10V DIM	
			Tunable White	Emergency Lighting Unit	
			CRI>90 , 2700K~6500K , Tunable White	2700K ~ 6500K	
			Different RAL Color Options	Plug-in Energy Input Con	
			Class-II Protection Class	PIR Sensor	
			AC-DC Supply(MBS)		

Order Code	W	Lm	Lm	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02170.66.30.030	28	2546	3000	Ra>80	595x595x65	575x575	3,0
02170.66.40.031	28	2680	4000	Ra>80	595x595x65	575x575	3,0

