




RAL 9016

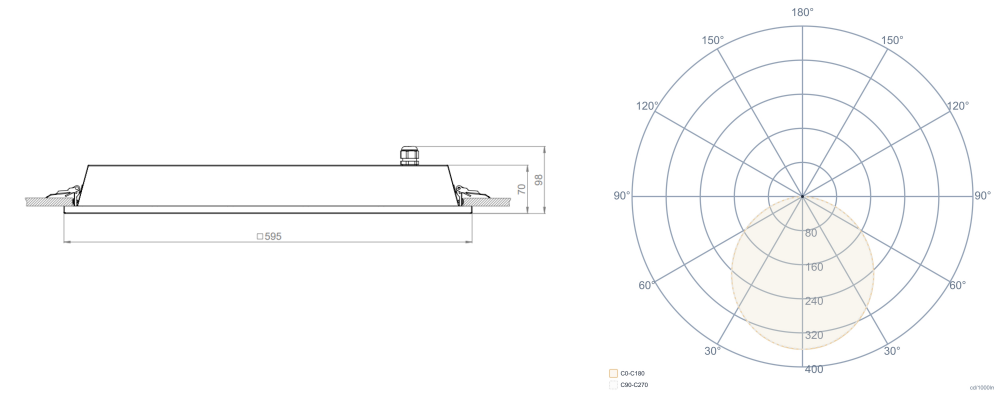

EVEN-G 600

02142

IP54 Sterile Lighting Fixture

Even-G 600 is designed for clean and controlled indoor environments and offers IP54 protection thanks to its silicone-sealed structure. Its opal diffuser distributes light homogeneously, creating comfortable and balanced lighting in workspaces. Its metal sheet housing and sealed construction ensure reliable use in areas where dust and moisture are controlled, while its 120° wide beam angle provides even illumination on surfaces. Its 600x600 mm dimensions allow for easy integration into modular ceiling systems.

It combines aesthetic appearance, high visual comfort, and reliable performance in hospitals, laboratories, healthcare facilities, pharmaceutical production areas, corridors, and other indoor spaces requiring high hygiene standards.



General Information		Electrical Info		Lighting Technology	
Material	DKP Metal Sheet	Power	28-35W	Light Output Angle	120°
Optics	Opal Diffuser	Power Factor	>0.95	UGR Value	UGR ≤ 22
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	CRI [Ra]	CRI ≥ 80
Insulation Class	Class I	Cabling	Halogen-Free	Color Bin Value	Mc Adams ≤ 3
Product Dimensions [mm]	595(W)x595(L)x100(H)	Input Voltage	220-240V AC / 50-60 Hz	Optional DALI / 1-10V CRI>90 , 2700K~6500K , Tunable White Emergency Lighting Unit	
Mounting Type	Recessed	LED Driver	Constant Current		
Mounting Part	Metal Bracket	Ambient Temperature	0°C / +40°C		
		LED Lifetime L70	>50.000 Hour		

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02142.66.30.033	28	3250	3000	595x595x70	580x580	4,50
02142.66.40.034	28	3350	4000	595x595x70	580x580	4,50
02142.66.30.036	33	3600	3000	595x595x70	580x580	4,50
02142.66.40.037	33	3700	4000	595x595x70	580x580	4,50
02142.66.30.040	35	4000	3000	595x595x70	580x580	4,50
02142.66.40.040	35	4100	4000	595x595x70	580x580	4,50

