





RAL 9005 RAL 9006

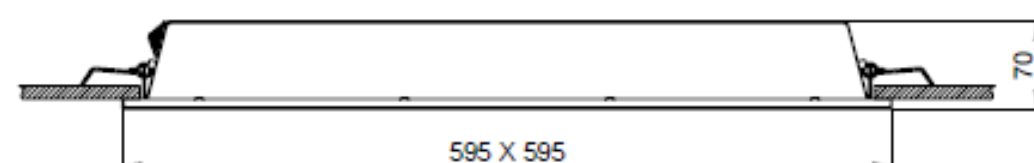

Twig
02177

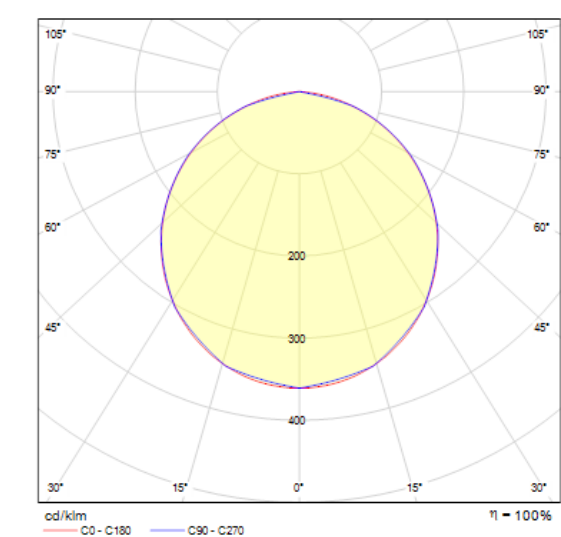

General Information		Electrical Info		Lighting Technology	
Body & Frame	Metal Sheet	Power	28W	Optics	Symmetrical
Diffuser	Opal with High Light Transmittance	Power Factor	>0.95	Light Output Angle	110°
Paint	Electrostatic Powder Paint	Light Source	SMD Mid Power LED	UGR Value	UGR ≤ 22
		Cabling	Halogen-Free	CRI [Ra]	CRI ≥ 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams ≤ 3
		LED Driver	High Efficiency Constant Current Output	Optional	
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	>50.000 Hour	DALI / 1-10V	
				1-10V DIM	
				Tunable White	
				Emergency Lighting Unit	
				CRI>90 , 2700K~6500K , Tunable White	
				2700K ~ 6500K	
				Different RAL Color Options	
				Plug-in Energy Input Cor	
				Class-II Protection Class	
				PIR Sensor	
				AC-DC Supply(MBS)	

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02177.66.30.030	28	2650	3000	Ra>80	595x595x65	575x575	3,0
02177.66.40.031	28	2790	4000	Ra>80	595x595x65	575x575	3,0

