

RAL 9006


MINSU


07104

Slim Design

Minsu is a compact and specially designed watertight lighting solution. Its anodized aluminum housing offers mechanical strength and long-lasting use. The product utilizes a silicone seal running the entire length between the housing and the opal diffuser. Special lugs on the diffuser apply pressure to this seal, creating IP65 protection between the housing and the diffuser. Silicone seals under the side covers provide additional protection against dust and moisture.

Offering surface-mounted or pendant mounting options thanks to its mounting springs, Minsu provides application flexibility in projects. It is a reliable and long-lasting lighting solution for corridors, parking lots, technical areas, production areas, warehouses, and humid environments.

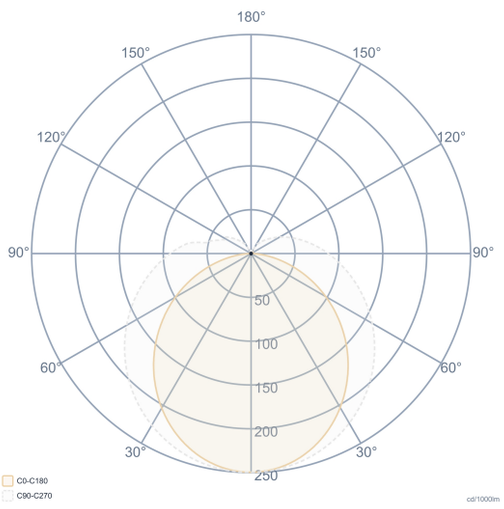

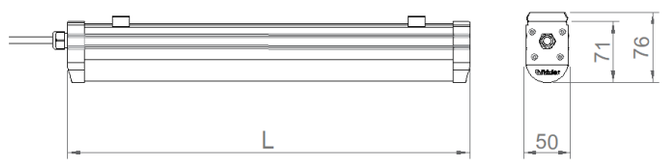

General Information	
Housing	Aluminum Extruded
Side Cover	PC Injection
Optics	Opal Diffuser
Gasket	Transparent Silicone
Paint	Anodized Coating
Insulation Class	Class I
Product Dimensions [mm]	50(W)x455(L)x71(H)
Mounting Type	Surface and Pendant
Mounting Part	Stainless Spring Stee

Electrical Info	
Power	13-49W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	130°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Kg
07104.04.40.014	13	1400	4000	50x455x71	0,50
07104.07.40.023	21	2300	4000	50x735x71	0,70
07104.08.40.028	25	2800	4000	50x875x71	0,70
07104.10.40.034	29	3400	4000	50x1015x71	1,00
07104.11.40.039	34	3900	4000	50x1155x71	1,60
07104.11.40.045	39	4500	4000	50x1155x71	1,60
07104.14.40.049	43	4900	4000	50x1435x71	1,90
07104.14.40.056	49	5600	4000	50x1435x71	1,90

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com