

Angel 900

Indoor Lighting - Pendant Lighting



Colour Options



TECHNICAL INFORMATION

Housing Extruded Aluminum Profile
Diffuser Highly Transmissive Opal Diffuser
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Symmetrical
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL




Power (W) 60-90W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +50°C
LED Lifetime L80B50 >50.000 Hour

OPTIONAL

- DALI
- Tunable White
- CRI > 90
- Different RAL Color Options
- Class-I Protection Class
- 1-10V DIM
- Emergency Lighting Unit
- 2700K ~ 6500K
- Plug-in Connector
- AC-DC Supply(MBS)

ASSEMBLY

Installation Type Pendant
Mounting Apparatus Height Adjustable Steel Wire

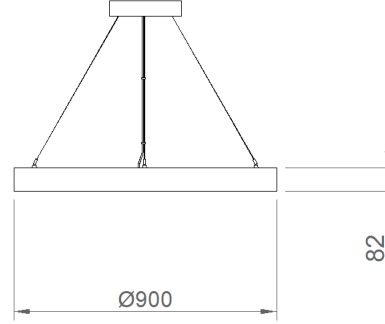

Order Code	W	Lm	CCT	CRI	ØxH (mm)	Kg
01140.90.30.055	60	4275	3000	Ra>80	Ø900x82	4,5
01140.90.40.058	60	4500	4000	Ra>80	Ø900x82	4,5
01140.90.30.077	90	7700	3000	Ra>80	Ø900x82	4,5
01140.90.40.081	90	8150	4000	Ra>80	Ø900x82	4,5

