





Angel 600

01140



RAL 9005 RAL 9006

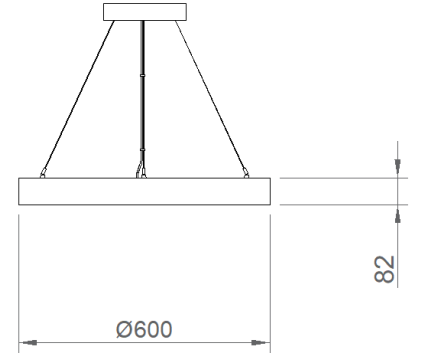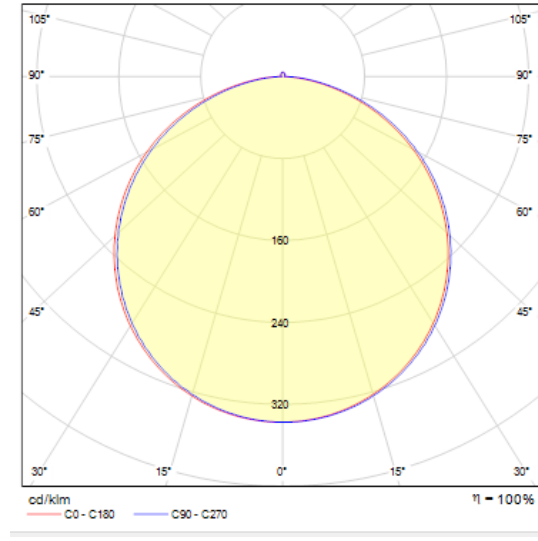

General Information		Electrical Info		Lighting Technology	
Housing	Extruded Aluminum Profile	Power	40-60W	Optics	Symmetrical
Diffuser	Aluminum Injection	Power Factor	>0.95	Light Output Angle	120°
Paint	Highly Transmissive Opal Diffuser	Light Source	SMD Mid Power LED	UGR Value	UGR < 22
		Cabling	Halogen-Free	CRI [Ra]	CRI > 80
		Input Voltage	220-240V AC / 50-60 Hz	Color Bin Value	Mc Adams < 3
		LED Driver	High Efficiency Constant Current Output		
		Ambient Temperature	-20°C / +50°C		
		LED Lifetime L70	50.000 Hour		
Optional					
DALI / 1-10V					
Tunable White					
Emergency Lighting Unit					
CRI>90 , 2700K~6500K , Tunable White					
2700K ~ 6500K					

Order Code	W	Lm	CCT	CRI	ØD x H (mm)	Kg
01140.60.30.037	40	3.200	3000	Ra>80	Ø600x82	3,0
01140.60.40.039	40	3.400	4000	Ra>80	Ø600x82	3,0
01140.60.30.051	60	4.800	3000	Ra>80	Ø600x82	3,0
01140.60.40.054	60	5.040	4000	Ra>80	Ø600x82	3,0

