

WINK-G

02141


Sterile Environment, Direct-Indirect Lighting


Wink-G is designed for sterile environments and healthcare facilities. It offers both direct and indirect lighting in the same product. The opal diffuser in the central section provides general lighting, while the white reflector surfaces on the sides direct the light, creating comfortable indirect lighting. Its tempered glass protected and sealed structure has an IP65 protection rating, making it resistant to dust and moisture. Thanks to its homogeneous light distribution, low glare, and comfortable lighting characteristics, it can be safely used in hospitals, clean rooms, laboratories, and healthcare facilities.

Especially in patient rooms and bedside lighting, its non-disturbing light structure increases user comfort and offers reliable solutions in areas requiring high hygiene standards.

CE | GLOW WIRE 650°C | IP65 | IK08 | RoHS COMPLIANT

RAL 9016

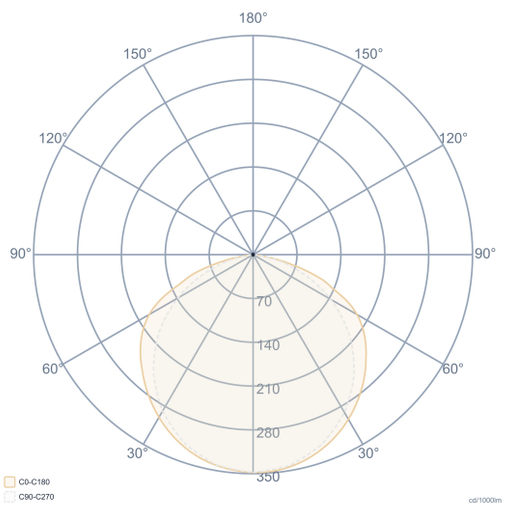

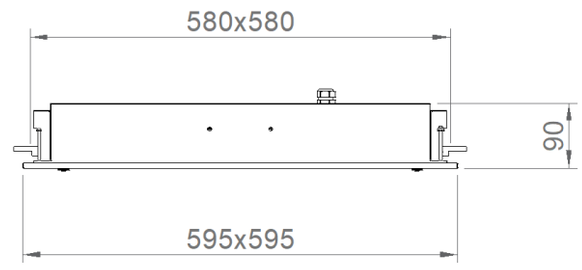

General Information	
Body & Frame	DKP Metal Sheet
Optics	Glass + Opal Diffuser
Paint	Electrostatic Powder Paint
Insulation Class	Class I
Product Dimensions [mm]	595(W) x 595(L) x 90(H)
Mounting Type	Recessed
Mounting Part	Metal Bracket

Electrical Info	
Power	32-60W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +40°C
LED Lifetime L70	>102.000 Hour

Lighting Technology	
Light Output Angle	120°
UGR Value	UGR ≤ 22
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02141.66.30.024	32	2820	3000	595x595x90	580x580	6,10
02141.66.40.025	32	2970	4000	595x595x90	580x580	6,10
02141.66.30.047	60	4020	3000	595x595x90	580x580	6,10
02141.66.40.048	60	4230	4000	595x595x90	580x580	6,10

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com