

Wink-G

Indoor Lighting - Sterile Environment Lighting



Colour Options

 Ral 9016
  Ral 9006
  Ral 9005

TECHNICAL INFORMATION

Housing Metal Sheet
Diffuser Tempered Clear Glass + Opal Diffuser
Paint Electrostatic Powder Paint

OPTICAL SPECIFICATIONS

Optics Direct - Indirect
Light Output Angle 120°
UGR Value UGR ≤ 22
CRI CRI ≥ 80
Color Bin Value Mc Adams ≤ 3

ELECTRICAL

Power (W) 32-60W
Power Factor >0.95
Light Source SMD Mid Power LED
Cabling Halogen-Free
Input Voltage 220-240V AC / 50-60 Hz
LED Driver High Efficiency Constant Current Output
Ambient Temperature -20°C / +40°C
LED Lifetime L80B50 >50.000 Hour



OPTIONAL

- DALI
 - Tunable White
 - CRI > 90
 - Different RAL Color Options
 - Class-II Protection Class
 - AC-DC Supply(MBS)

- 1-10V DIM
 - Emergency Lighting Unit
 - 2700K ~ 6500K
 - Plug-in Connector
 - PIR Sensor

ASSEMBLY

Installation Type Under Plaster
Mounting Apparatus Metal Bracket

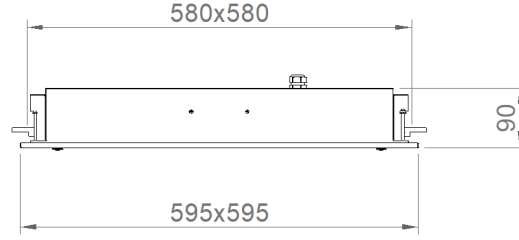

Order Code	W	Lm	CCT	CRI	WxLxH (mm)	Ceiling Cutting (mm)	Kg
02141.66.30.024	32	2820	3000	Ra>80	595x595x90	580x580	6,1

