


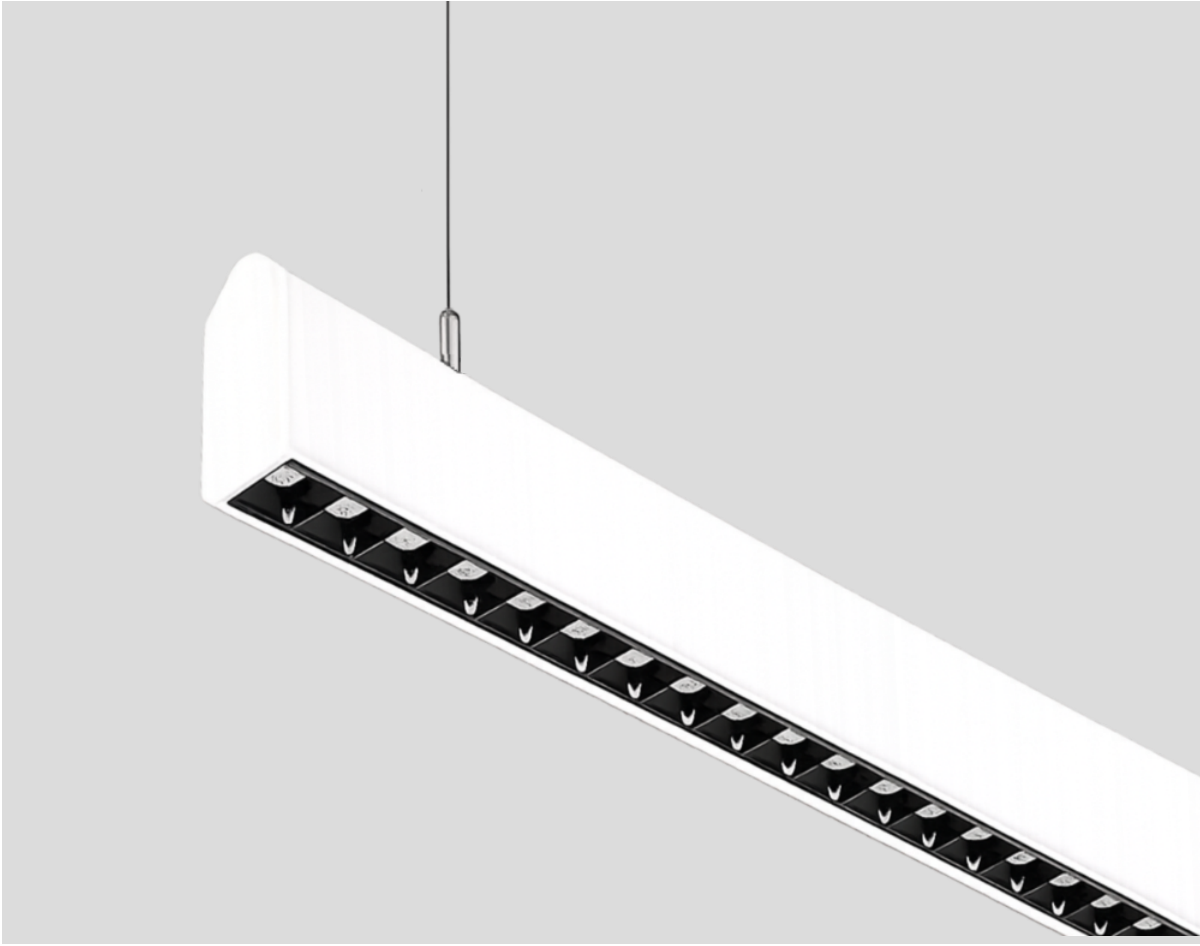



## DUET-P

## 01181

### Pendant Lighting Luminaire

The DUET Series stands out with its U-shaped body structure and unique cover finish, deviating from standard rectangular forms. Thanks to its 37mm wide aluminum body and screwless design, it offers a simple and premium look. Its dark optics provide low  $UGR \leq 17$  glare control and various light output angle options.

It is compatible with various projects with pendant and surface mounting options.

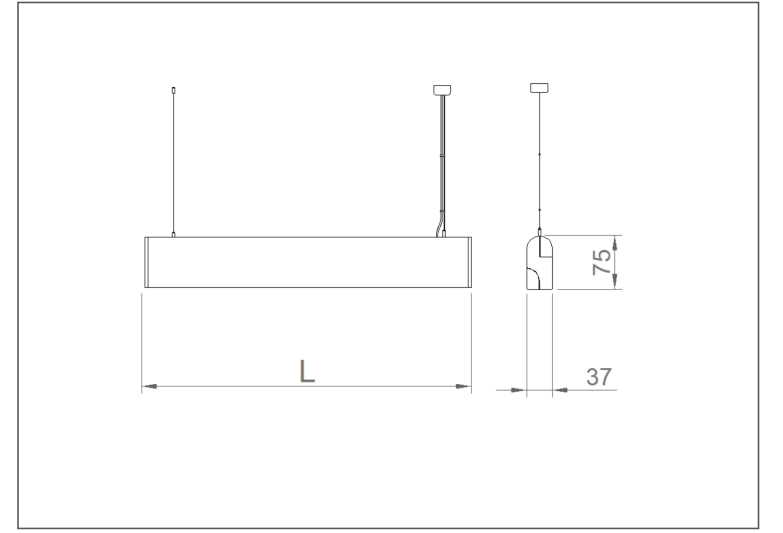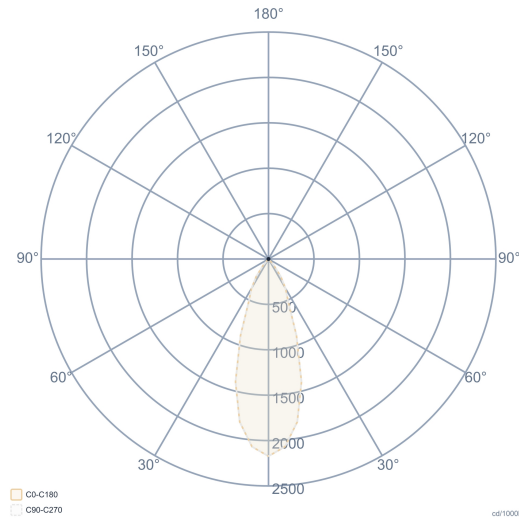

| General Information            |                              | Electrical Info            |                        | Lighting Technology                                                                                |              |
|--------------------------------|------------------------------|----------------------------|------------------------|----------------------------------------------------------------------------------------------------|--------------|
| <b>Housing</b>                 | Aluminum Extruded            | <b>Power</b>               | 22-34W                 | <b>Light Output Angle</b>                                                                          | 36°          |
| <b>Side Cover</b>              | Aluminum Injection           | <b>Power Factor</b>        | >0.95                  | <b>UGR Value</b>                                                                                   | UGR ≤ 17     |
| <b>Optics</b>                  | PMMA Lens + Reflector        | <b>Light Source</b>        | SMD Mid Power LED      | <b>CRI [Ra]</b>                                                                                    | CRI ≥ 80     |
| <b>Paint</b>                   | Electrostatic Powder Painted | <b>Cabling</b>             | Halogen-Free           | <b>Color Bin Value</b>                                                                             | Mc Adams ≤ 3 |
| <b>Insulation Class</b>        | Class I                      | <b>Input Voltage</b>       | 220-240V AC / 50-60 Hz | <b>Optional</b><br>DALI / 1-10V<br>CRI>90 , 2700K~6500K , Tunable White<br>Emergency Lighting Unit |              |
| <b>Product Dimensions [mm]</b> | 37(W) x 75(H)                | <b>LED Driver</b>          | Constant Current       |                                                                                                    |              |
| <b>Mounting Type</b>           | Pendant                      | <b>Ambient Temperature</b> | -20°C / +50°C          |                                                                                                    |              |
| <b>Mounting Part</b>           | Height Adjustable Steel Wire | <b>LED Lifetime L70</b>    | >50.000 Hour           |                                                                                                    |              |

| Order Code      | W  | Lm   | CCT  | WxH (mm) | L (mm) | Kg   |
|-----------------|----|------|------|----------|--------|------|
| 01181.37.30.030 | 28 | 3000 | 3000 | 39x78    | 1225   | 3,60 |
| 01181.37.40.032 | 28 | 3200 | 4000 | 39x78    | 1225   | 3,60 |
| 01181.37.30.036 | 34 | 3660 | 3000 | 36x75    | 1495   | 4,40 |
| 01181.37.40.038 | 34 | 3880 | 4000 | 36x75    | 1495   | 4,40 |

