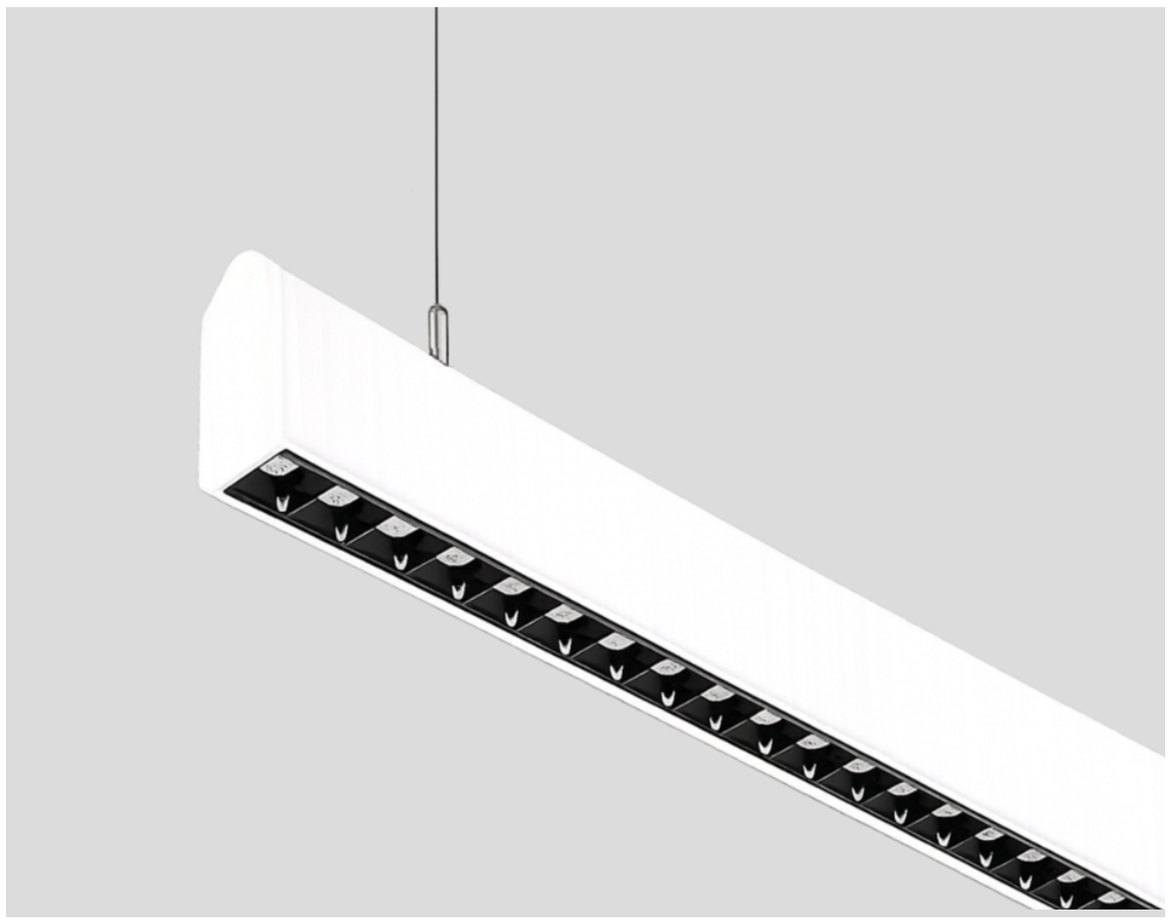


DUET-P


01181


Pendant Lighting Luminaire

The DUET Series stands out with its U-shaped body structure and unique cover finish, deviating from standard rectangular forms. Thanks to its 37mm wide aluminum body and screwless design, it offers a simple and premium look. Its dark optics provide low UGR≤17 glare control and various light output angle options.

It is compatible with various projects with pendant and surface mounting options.

RAL 9016 RAL 9005 RAL 9006

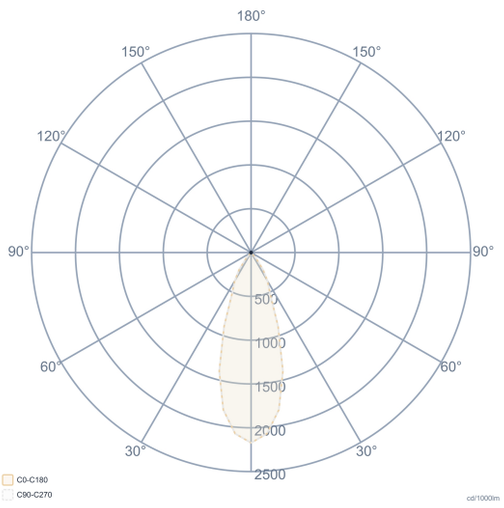

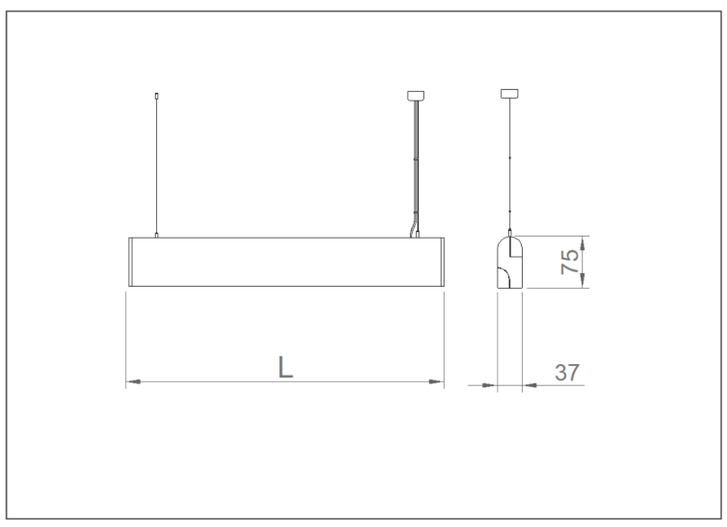

General Information	
Housing	Aluminum Extruded
Side Cover	Aluminum Injection
Optics	PMMA Lens + Reflector
Paint	Electrostatic Powder Painted
Insulation Class	Class I
Product Dimensions [mm]	37(W) x 75(H)
Mounting Type	Pendant
Mounting Part	Height Adjustable Steel Wire

Electrical Info	
Power	22-34W
Power Factor	>0.95
Light Source	SMD Mid Power LED
Cabling	Halogen-Free
Input Voltage	220-240V AC / 50-60 Hz
LED Driver	Constant Current
Ambient Temperature	-20°C / +50°C
LED Lifetime L70	>60.000 Hour

Lighting Technology	
Light Output Angle	36°
UGR Value	UGR ≤ 17
CRI [Ra]	CRI ≥ 80
Color Bin Value	Mc Adams ≤ 3

Optional
DALI / 1-10V
CRI>90 , 2700K~6500K , Tunable White
Emergency Lighting Unit

Order Code	W	Lm	CCT	WxHxL (mm)	Kg
01181.37.30.030	28	3000	3000	37x75x1225	3,60
01181.37.40.032	28	3200	4000	37x75x1225	3,60
01181.37.30.036	34	3660	3000	37x75x1495	4,40
01181.37.40.038	34	3880	4000	37x75x1495	4,40

Verilen tüm elektriksel değerler nominal değerlerdir. Işık akısı ve bağlı elektrik yükü +/- %10 luk bir başlangıç toleransına tabidir. Renk sıcaklığı toleransı: +/-150 K.
Katalogda ve web sitesinde yer alan teknik parametreler ve ürün kodlarını içeren bilgiler, projelere göre yapılan kişiselleştirmelerden dolayı standart ürünlerden farklılık gösterebilir.
İkizler Aydınlatma, ürünlerde haber vermeden değişiklik yapma hakkına sahiptir.

+90 (216) 397 22 16
info@ikizleraydinlatma.com